

RoHS





SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°c to +105°c

Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

J	X	XXX	X	XX	X	X	X	XXXX
产品类别 J=间距	间距	总Pin数 01E=16P	产品形态 1=DIP 2=RA 3=SMT 4=SH 5=表面贴	电镀厚度 00=常规 01=1u" 02=2u" 03=3u" SN=镀锡	塑胶材料 1=PBT 2=LCP 3=PFS 4=PA66 5=PA6T 9=PA9T	塑胶颜色 1=黑色 2=灰色 3=白色 4=蓝色 5=红色 6=黄色 7=灰白色	包装方式 1=散装 2=卷装 3=带装 4=袋装 5=盘装	序列号 0001-9999

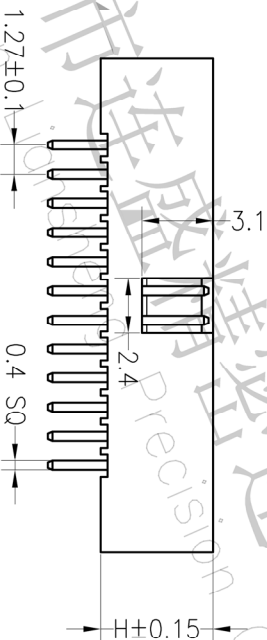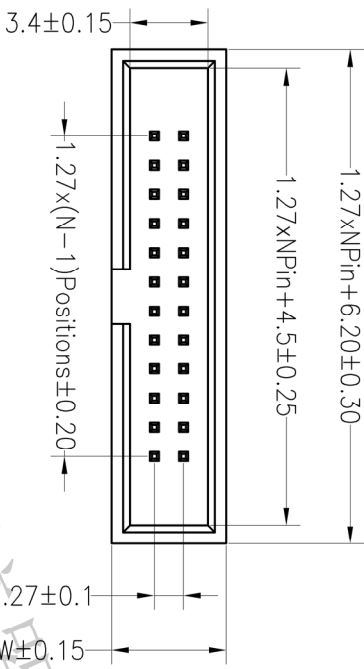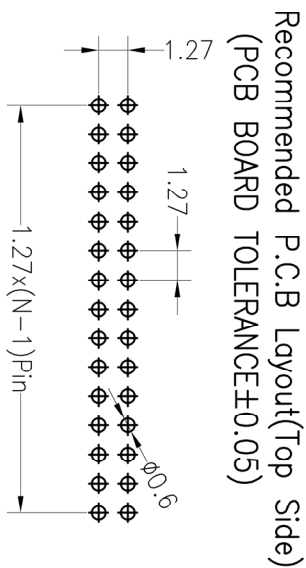

Dimension antitheses list

ITEM	PB	PC	PW	H	W
001		2.3		4.9	5.0
002					



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW	
X.X	±0.30		
X.XX	±0.20	CHECK	
X.XXX	±0.10		
Angle	±3°	APPROVE	
DIM	TOL		

SCALE	FIT	PART NO.
UNIT	mm	
SIZE	A4	1.27Box 2*Npin H4.9 180°
SHEET	1/1	
PROJ.		TITLE:

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	
1			