


RoHS

SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA9T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

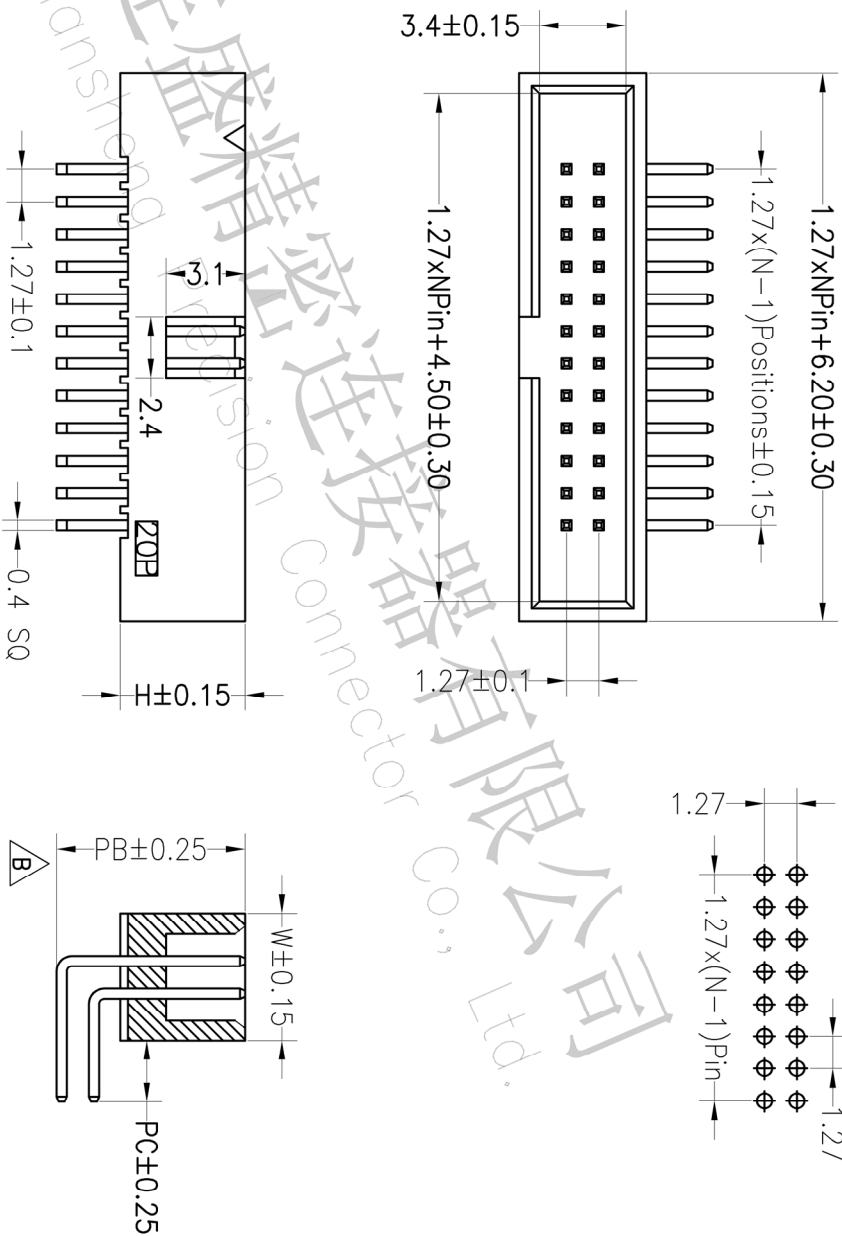

Ordering Information

J	X	XXX	X	XX	X	X	X	XXXX
产品类型 J=附件	间距 1=1.27 2=2.0 3=2.54 4=3.96 5=1.0 6=0.8 7=5.08 A=1.27*2.54	总Pin数 016=16P	产品形态 1=OP 2=RA 3=SM 4=SH 5=线载脚	电缆厚度 00=常规 01=1.0" 02=2.0"	塑胶材料 1=PBT 2=LCP 3=PPS 4=PA46 5=PA6T 9=PA9T	塑胶颜色 1=黑色 2=灰色 3=白色 4=红色 5=黄色 7=灰白色	包装方式 1=管装 2=卷装 3=盘装 4=袋装 5=盒装	序列号 0001-9999

Dimension antitheses list

ITEM	PB	PC	PW	H	W
001	7.4	2.3		4.9	5.0
002					



OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm	A4	1/1	1.27Box Header Npin H4.9 90°	
X.XX	±0.20	CHECK		SIZE	A4			TITLE: L=10.0/12.5	
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								
1	2	3	4	5	6	7	8	9	