





1 2 3 4 5 6 7 8 9

**RoHS**

**SPECIFICATIONS**

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

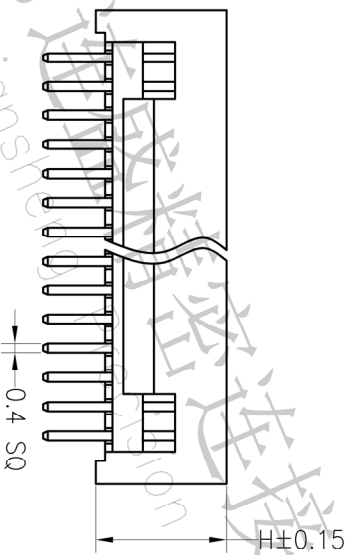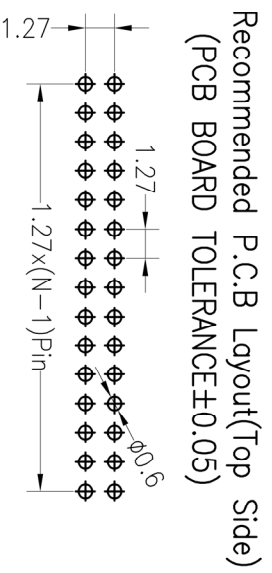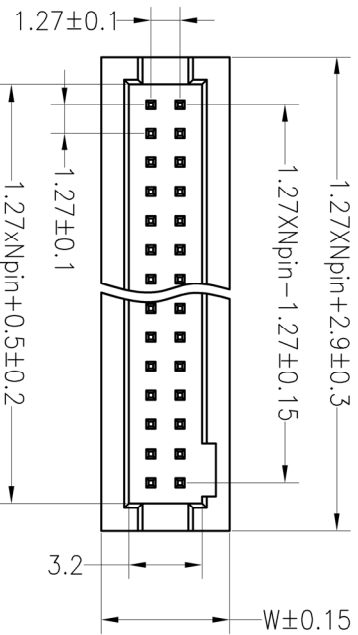

**Ordering Information**

|              |   |                  |   |  |   |   |  |                  |
|--------------|---|------------------|---|--|---|---|--|------------------|
| J            | X   | XXX              | X   | XX   | X   | X   | X  | XXXX             |
| 产品类别<br>J=筒牛 | 间距<br>1-1.27<br>2-2.0<br>3-2.54<br>4-3.96<br>5-1.0<br>6-2.0<br>7-2.0<br>A=1.27*2.54 | 总Pin数<br>016=16P | 产品形态<br>1-DIP<br>2-RA<br>3-SMT<br>4-SH<br>5=线数脚 | 电缆长度<br>00=高线<br>01=1u"<br>02=2u"<br>03=3u"<br>SN=线脚 | 塑胶材料<br>1=PB1<br>2=LCP<br>3=PPS<br>4=PA46<br>5=PA6T<br>9=PA9T | 塑胶颜色<br>1=黑色<br>2=灰色<br>3=白色<br>4=蓝色<br>5=黄色<br>7=灰白色 | 包封方式<br>1=穿线<br>2=插接<br>3=插接<br>4=穿线<br>5=插接 | 序列号<br>0001-9999 |

**Dimension antitheses list**

| ITEM | PB | PC  | PW | H   | W   |
|------|----|-----|----|-----|-----|
| 001  |    | 2.3 |    | 5.7 | 5.6 |
| 002  |    |     |    |     |     |



深圳市连盛精密连接器有限公司  
 Shenzhen Liansheng Precision Connector Co., Ltd.

|   |           |            |                          |         |       |     |         |            |       |          |                        |
|---|-----------|------------|--------------------------|---------|-------|-----|---------|------------|-------|----------|------------------------|
| A | REV       | DATE       | MODIFICATION DESCRIPTION | CHANGE  | DIM   | TOL | APPROVE | SCALE      | FIT   | PART NO. | TITLE:                 |
|   | A0        | 2012.09.18 | NEW DRAWING              |         |       |     |         | UNIT<br>mm | A4    | 1/1      | 1.27Box Npin H5.7 180° |
| B | OPERATION | DRAW       | CHECK                    | APPROVE | SCALE | FIT | SIZE    | SHEET      | PROJ. |          |                        |
| C | X.X       | ±0.30      |                          |         |       |     |         |            |       |          |                        |
| D | X.XX      | ±0.20      |                          |         |       |     |         |            |       |          |                        |
| E | X.XXX     | ±0.10      |                          |         |       |     |         |            |       |          |                        |
| F | Angle     | ±3°        |                          |         |       |     |         |            |       |          |                        |
| G | 1         | 2          | 3                        | 4       | 5     | 6   | 7       | 8          | 9     |          |                        |