
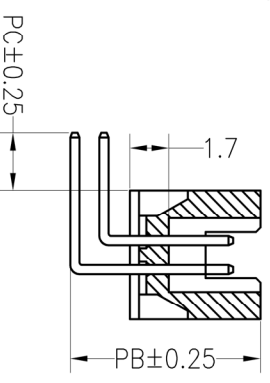
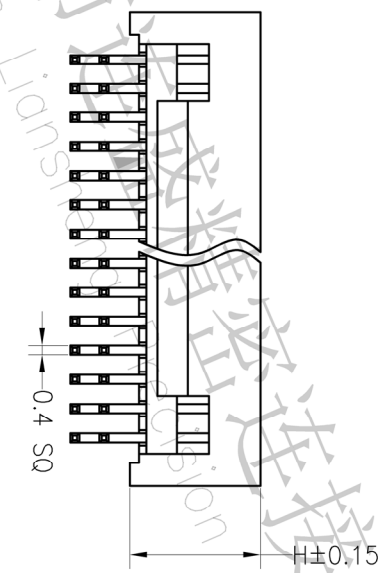
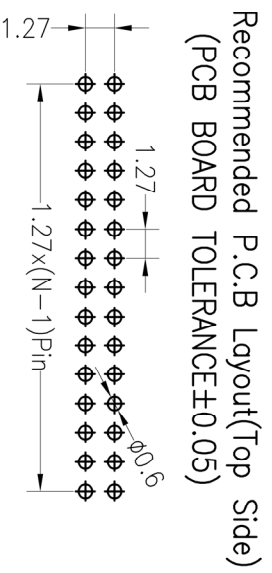


# RoHS

## SPECIFICATIONS

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

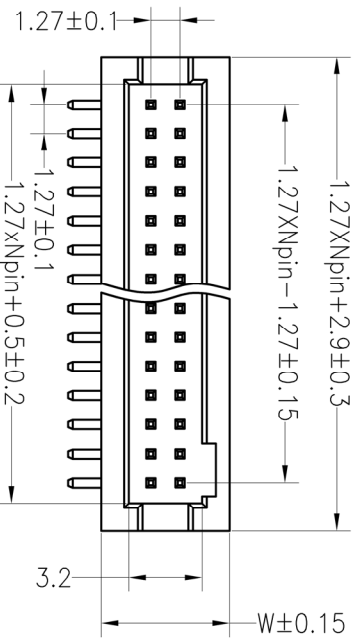


## Ordering Information

产品类别	J	X	XXX	X	XX	X	X	X	XXXX
J=筒作	间距	总长度	产品形态	电缆厚度	塑胶材料	塑胶颜色	包装方式	序号	
	1=1.27	016=16P	1-DIP	00=常规	1=PBT	1=灰色	1=卷盘	0001-9999	
	2=2.0		2-RA	01=10"	2=ICP	2=灰色	2=卷盘		
	3=2.54		3-SMT	02=20"	3=PPS	3=白色	3=盘装		
	4=3.96		4-SH	03=30"	4=PA46	4=蓝色	4=袋装		
	5=1.0		5=线胶脚	SV=线脚	5=PA6T	5=红色	5=盘装		
	6=0.8				9=PAAT	6=黄色			
	7=3.06					7=灰白色			
	A=12.7*2.54								

## Dimension antitheses list

ITEM	PB	PC	PW	H	W
001	8.3	2.5		5.7	5.6
002					



A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	SCALE	FIT	PART NO.	TITLE:
	A0	2012.09.18	NEW DRAWING		Angle	±3°		SIZE	A4	1/1	1.27Box Header Npin H5.7 90°
B	OPERATION	DRAW	CHECK	APPROVE	UNIT	mm	SHEET	PROJ.			
C	X.X	±0.30			SCALE						
D	X.XX	±0.20			UNIT						
E	X.XXX	±0.10			SIZE						
F					SHEET						
G					PROJ.						