

ROHS


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS


Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)

Standard: PA6T
Max.Processing Temp: 230°C for 30–60 seconds
(260°C for 10 seconds)

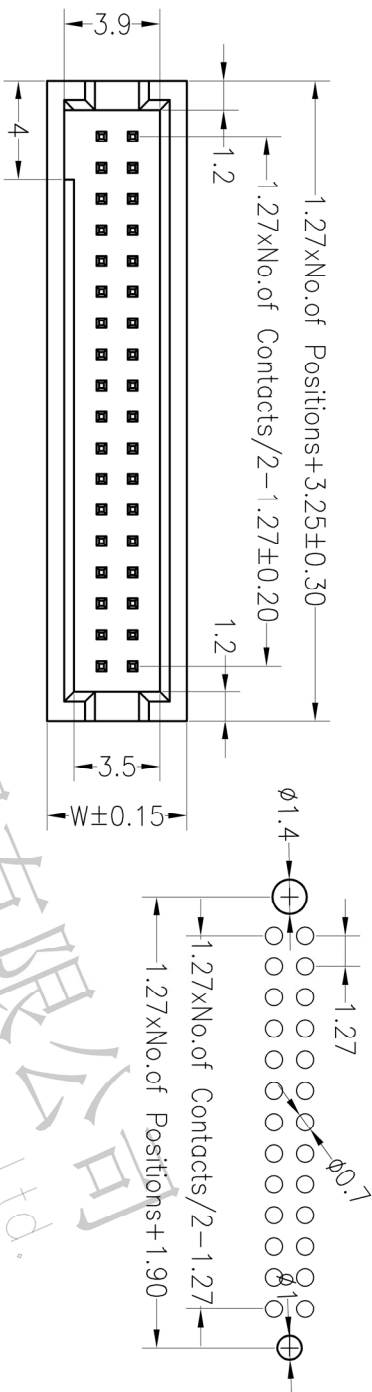

Ordering Information

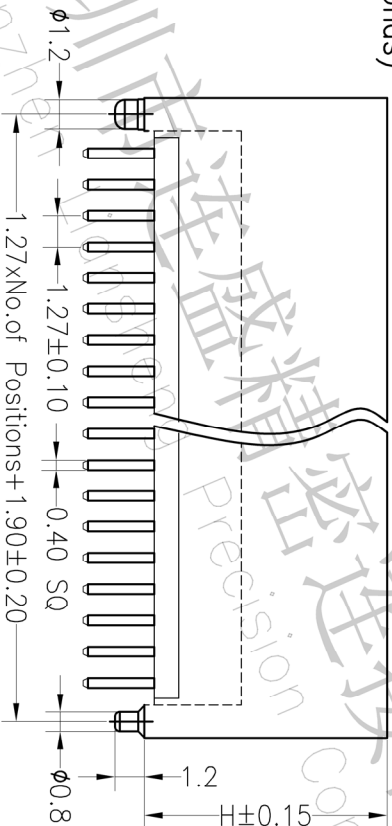

Dimension antitheses list

ITEM	PB	PC	PW	H	W
001		2.4		9.9	5.7
002					

产品类别 J=附件	例函 1-27	总引数 016=16P	产品形态 1=1D 2=2A 3=3MT 4=3H 5=侧脚	电镀厚度 00=常规 01=1u" 02=2u" 03=3u" SN=镀锡	塑胶材料 1=PB 2=PC 3=PS 4=PA46 5=PA6T 9=PA9T	塑胶颜色 1=黑色 2=灰色 3=白色 4=蓝色 5=红色 7=灰白色	包装方式 1=管装 2=卷装 3=盘装 4=袋装 5=盒装	序列号 0001-9999
A=1.27*2.54								

深圳市连盛精密连接器有限公司
Shenzhen Liansheng Precision Connector Co., Ltd.



深圳市连盛精密连接器有限公司
Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

PART NO.

TITLE:

1.27 BDX 2#NP HEADER H9.9 180°

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

9

2

3

4

5

6

7

8

9