


# RoHS

## SPECIFICATIONS

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°c to +105°c  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

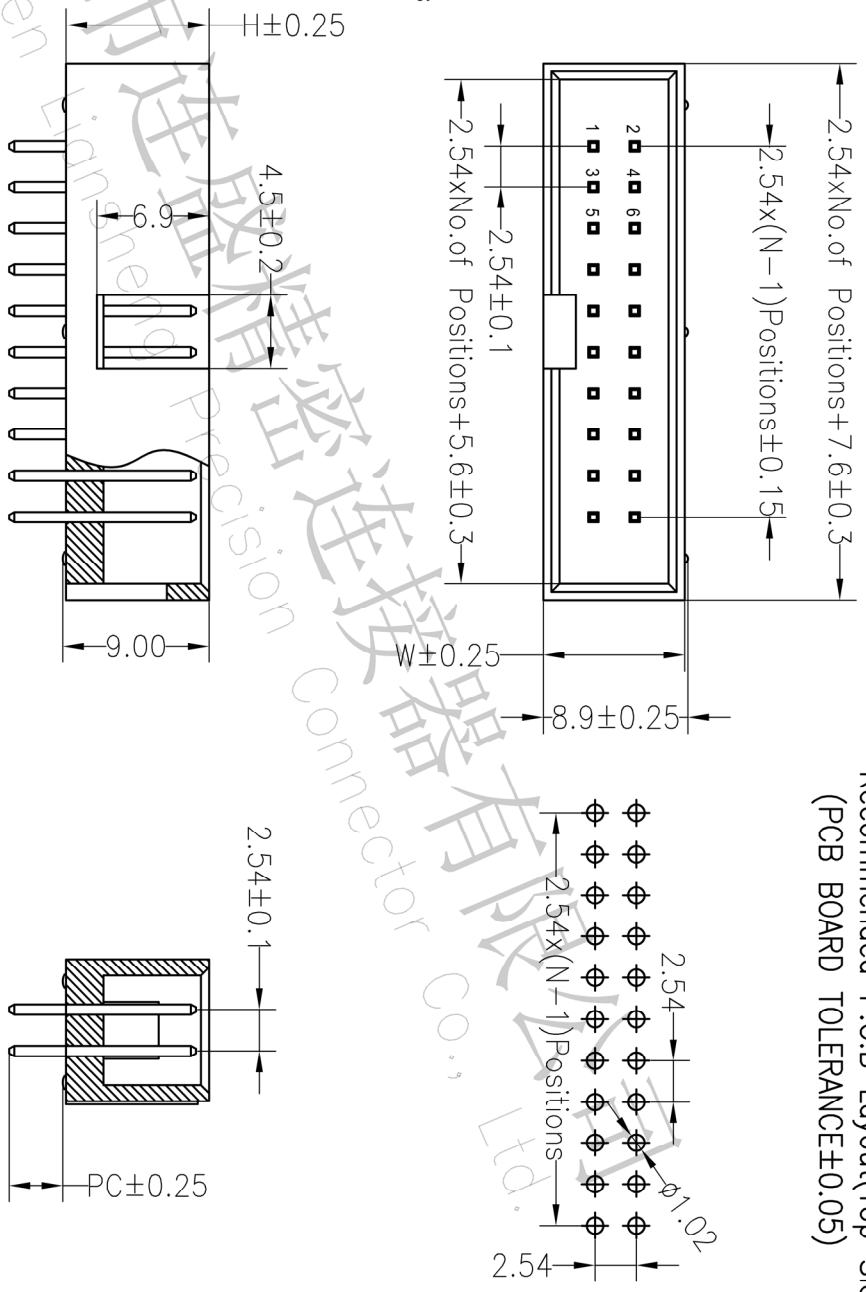


## Ordering Information

J	X	XXX	X	XX	X	X	X	XXXX
---	---	-----	---	----	---	---	---	------

产品类别 J=前件  
 1=1.27 2=2.0 3=2.54 4=3.96 5=1.0 6=0.8 7=0.6  
 A=1.27/2.54  
 产品形态 1=DIP 2=RA 3=SMT 4=SH 5=板级脚  
 1=DIP 2=RA 3=SMT 4=SH 5=板级脚  
 电脚高度 00=密脚 01=1.0" 02=2.0" 03=3.0" 04=3.96" 05=1.0" 06=0.8" 07=0.6"  
 绝缘材料 1=PBT 2=LCP 3=PPS 4=PA6 5=PA6T 6=PA9T 7=聚酰胺  
 塑胶颜色 1=蓝色 2=灰色 3=白色 4=黄色 5=红色 6=棕色 7=米白色  
 包装方式 1=散装 2=卷装 3=盘装 4=袋装 5=筒装  
 序列号 0001-9999

ITEM	PB	PC	PW	H	W
001		3.3		8.8	8.7
002					



A		B		C		D		E		F		G	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.	TITLE:	CHANGE	APPROVE	PROJ.	
1	2012.03.28	NEW DRAWING		X.X ±0.30	CHECK	mm	A4	2.54mm Box 2*NP H8.8mm DIP					
				X.XX ±0.20	CHECK								
				X.XXX ±0.10	CHECK								
				Angle ±3°	APPROVE								
				DIM TOL	APPROVE								