


# RoHS


## SPECIFICATIONS

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

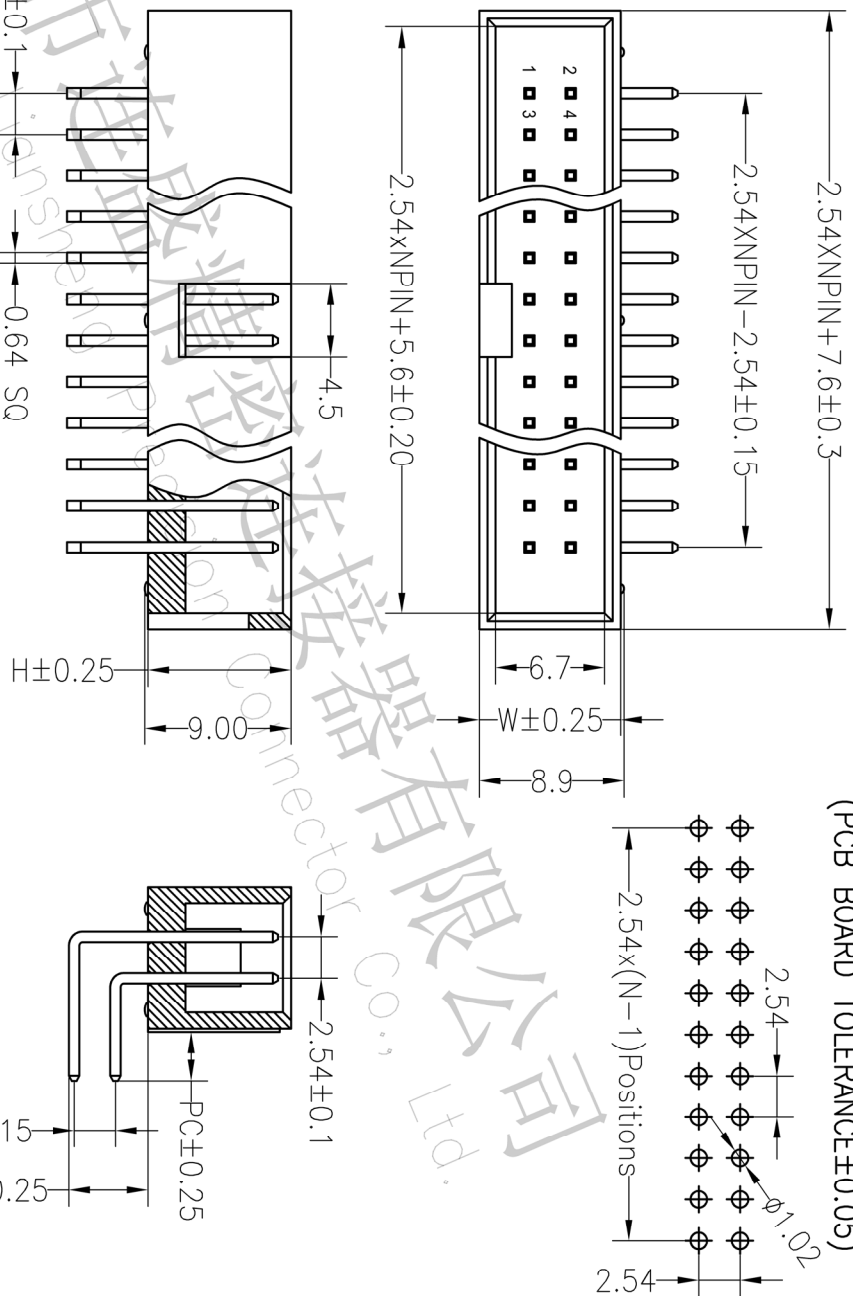

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

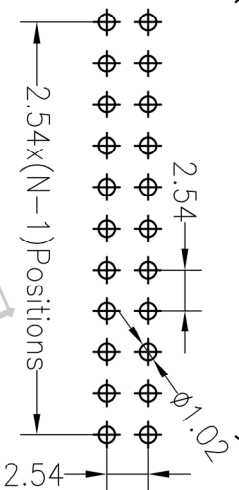

## Ordering Information

J	X	XXX	X	XX	X	X	X	XXXX
---	---	-----	---	----	---	---	---	------

产品类别 J=前牛  
 间距 1=1.27 2=2.0 3=2.54 4=3.96 5=1.0 7=5.08 A=1.27\*2.54  
 总行数 016=16P  
 产品形态 1=DIP 2=FA 3=SMT 4=SH 5=线束脚  
 电鍍厚度 00=常规 01=1u" 02=2u" 03=3u"  
 塑料材料 1=PBT 2=LCP 3=PPS 4=PA66 5=PA6T 9=PA6T  
 塑胶厚度 1=常规 2=LCP 3=PPS 4=PA66 5=PA6T 9=PA6T  
 塑胶颜色 1=黑色 2=蓝色 3=白色 4=绿色 5=红色 6=灰色 7=灰白色  
 包装方式 1=管装 2=卷装 3=盘装 4=袋装 5=盘装  
 序列号 0001-9999

ITEM	PB	PC	PW	H	W
001		3.0		8.8	8.7
002					



深圳市连盛精密连接器有限公司  
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm			2.54BOX NP H=8.8 正等 PC3.0	
X.XX	±0.20	CHECK		SIZE	A4			TITLE:	
X.XXX	±0.10			SHEET	1/1			2.54BOX NP H=8.8 正等 PC3.0	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE		
1				4					
A		B		C		D		E	
A		B		C		D		E	
A		B		C		D		E	