


# RoHS

## SPECIFICATIONS

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C


Contact Material: Brass  
 Contact Plating: Au Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

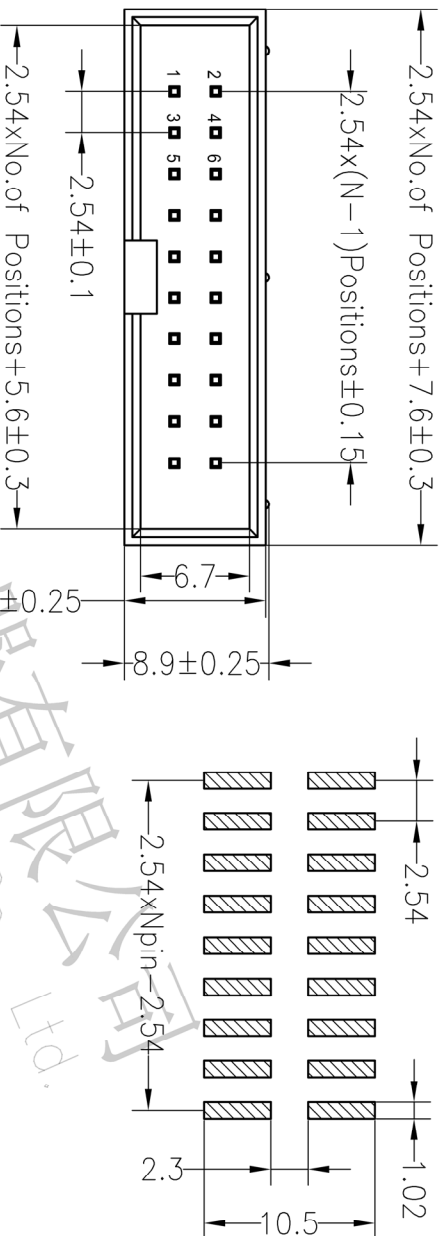

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ± 0.05)

## Ordering Information

J	X	XXX	X	XX	X	X	X	XXXX
产品类别	间距	总Pin数	产品形态	电键厚度	塑胶材料	塑胶颜色	包装方式	序列号
J=英寸	1=1.27 2=2.0 3=2.54 4=3.96 5=1.0 6=1.0 7=1.0 A=1.27-2.54	016=16P	1=DIP 2=RA 3=SMT 4=SH 5=表面脚	00=常规 01=1u" 02=2u" 03=3u"	1=PBT 2=LCP 3=PPS 4=PA46 5=PA6T 9=PA9T	1=黑色 2=灰色 3=白色 4=蓝色 5=红色 7=灰白色	1=管装 2=卷装 3=盘装 4=袋装 5=盘装	0001-9999

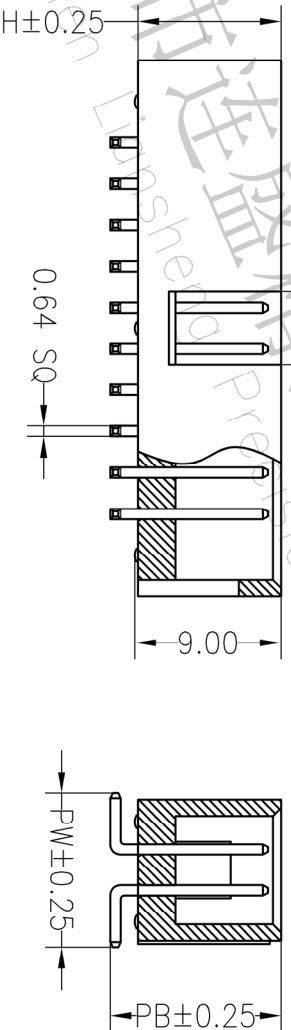

ITEM	PB	PC	PW	H	W
001	10.5	9.5	8.8	8.8	8.7
002					

 深圳市连盛精密连接器有限公司  
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4				
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.				TITLE:	2.54BOX H8.8mm NP SMT
DIM	TOL								
REV	DATE	MODIFICATION DESCRIPTION	CHANGE						
1	2012.03.28	NEW DRAWING							