


# ROHS




## SPECIFICATIONS

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

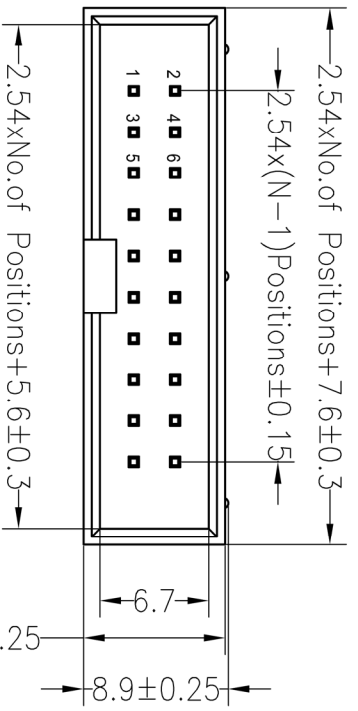

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ± 0.05)

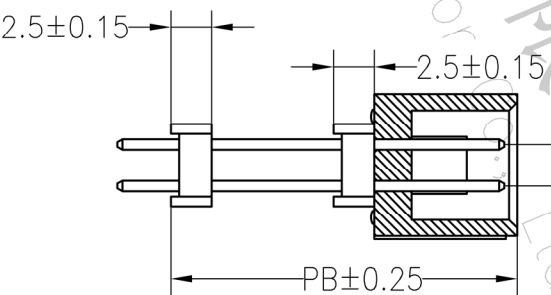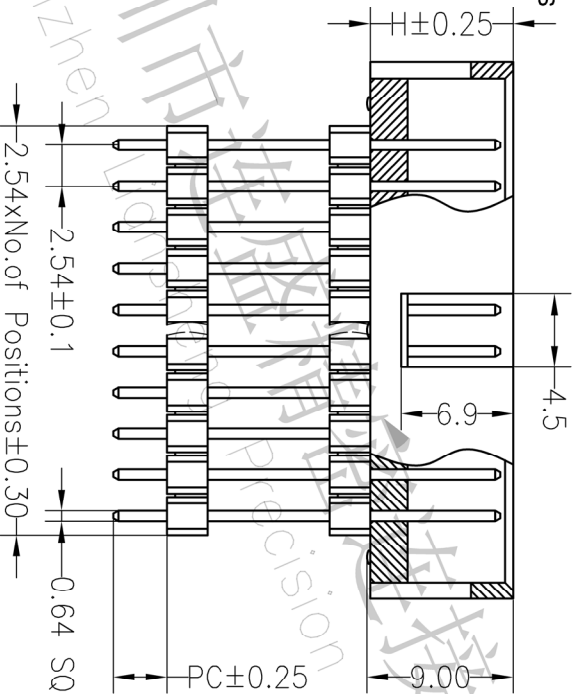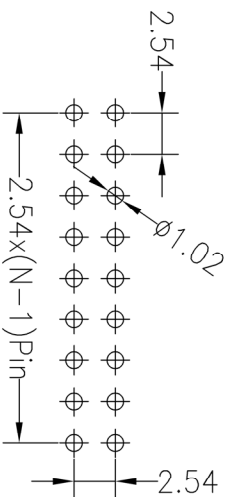

## Ordering Information

J	X	XXX	X	XX	X	X	X	XXXX
产品类别 J-附件	品牌 1-1:27 2-2:0 3-2:54 4-3:96 5-1:0 5-2:8 A-1:27+2:54	型号/规格 016-16P	产品形态 1-DIP 2-RNA 3-SMT 4-SH 5-贴片脚	电镀厚度 00=无镀 01=10" 02=20" 03=30"	塑胶材料 1=PBT 2=LCP 3=PPS 4=PA66 5=PA6T 9=PA9T	塑胶颜色 1=黑色 2=棕色 3=白色 4=蓝色 5=红色 7=灰白色	封装方式 1=直插 2=贴片 3=直插 4=贴片 5=贴片	序列号 0001-9999

ITEM	PB	PC	PW	H	W
001	24.0	3.0		8.8	8.7
002					



深圳市连盛精密连接器有限公司  
 Shenzhen LianSheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm			2.54Box 3H=8.8+2X2.5 NP DIP	
X.XX	±0.20	CHECK		SIZE	A4	SHEET		TITLE:	
X.XXX	±0.10			Angle	±3°	PROJ.		PB24.0 PC3.0	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE		
A0	2012.10.05	NEW DRAWING							
1		2		3			4	5	6