

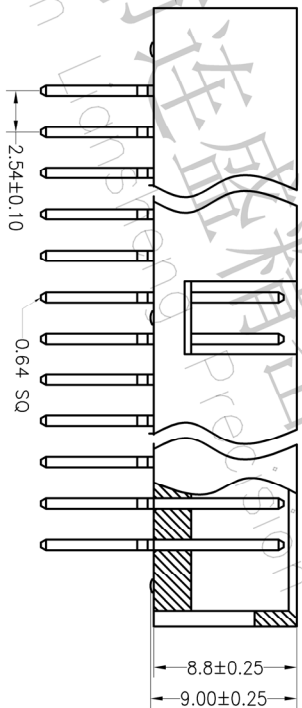
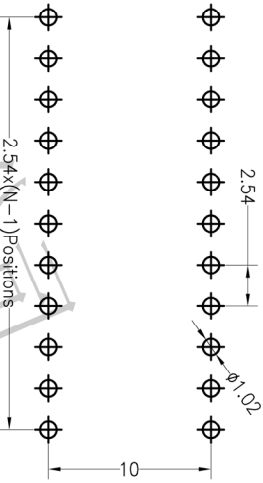


# RoHS

## SPECIFICATIONS

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:−40°C to +105°C


Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30–60 seconds  
 (200°C for 10 seconds)

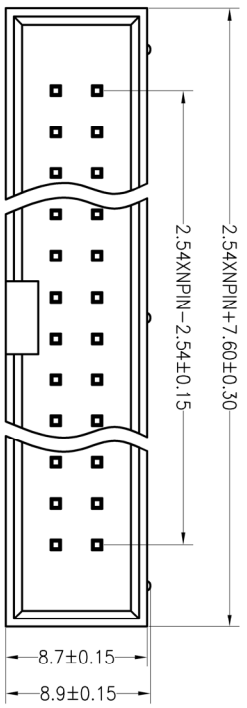

## Ordering Information

J	X	XXX	X	XX	X	X	X	XXXX
产品类型	间距	总引针数	产品形态	电缆屏蔽	塑胶材料	绝缘颜色	包装方式	序列号
J=扁平	2.54	016=16P	00=DP	00=常规	1=PBT	1=灰色	1=管装	0001-9999
	3-2.54		01=1U*	1=1U*	2=LCP	2=灰色	2=卷装	
	4-3.96		3=SMT	02=2U*	3=PPS	3=白色	3=盘装	
	5-1.0		4=SH	03=3U*	4=PA6	4=蓝色	4=盘装	
	6-0.8		5=嵌脚	SN=镀锌	5=PA66	5=红色	5=盘装	
	7-5.08				6=PA9T	6=黄色		
	A=1.27*2.54				7=PA9T	7=灰白色		

ITEM	PB	PC	PW	H	W
001					
002					



深圳市连盛精密连接器有限公司  
 Shenzhen LianSheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4	SHEET		TITLE:	
X.XXX	±0.10			ANGLE	±3°	PROJ.		2.54mm Box 2*NP Header H8.8mm	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL	APPROVE		180°	
1									