
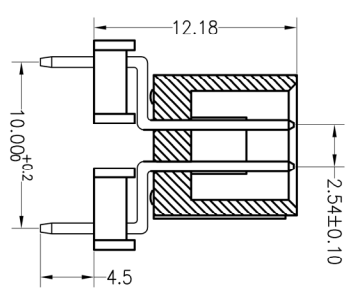
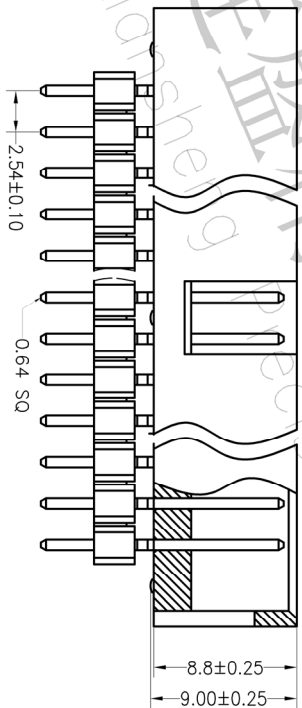
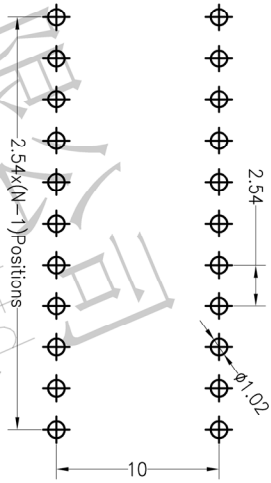


RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:−40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30–60 seconds
 (200°C for 10 seconds)

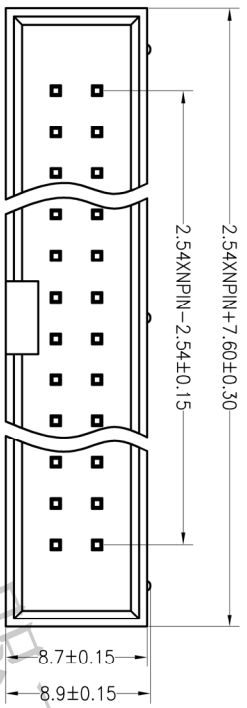

Ordering Information

J	X	XXX	X	XX	X	X	X	XXXX
---	---	-----	---	----	---	---	---	------

产地类别 01=27 016=16P
 产品系列 1=DP 2=RA 3=SNIT 4=SH 5=镀镍脚
 电鍍厚度 01=10 02=20 03=30 04=50 05=50
 鍍层材料 1=PBT 2=PC 3=DBC 4=PA6 5=PA6T 9=PA9T
 塑胶颜色 1=黑色 2=灰色 3=白色 4=蓝色 5=红色 6=黄色 7=灰白色
 包装方式 1=管装 2=盘装 3=盒装 4=袋装 5=盒装
 序列号 0001-9999

ITEM	PB	PC	PW	H	W
001					
002					

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4	SHEET		TITLE:	
X.XXX	±0.10			ANGLE	±3°	APPROVE		2.54mm Box 2*NP Header H8.8mm	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL	PROJ.		180°	
1									