
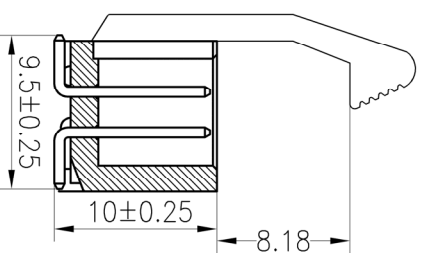
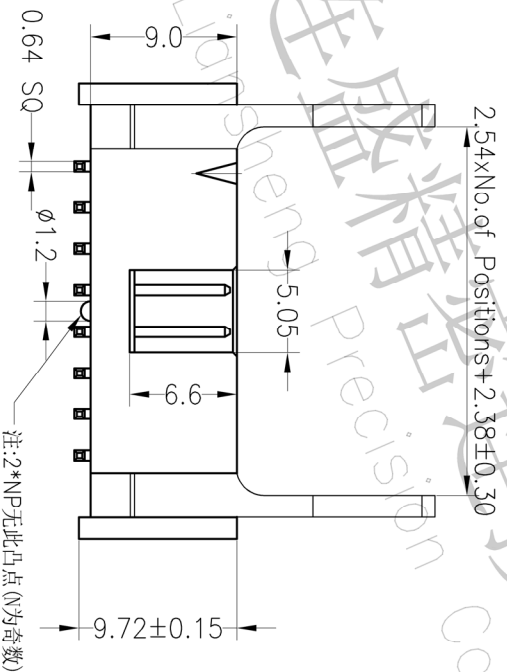
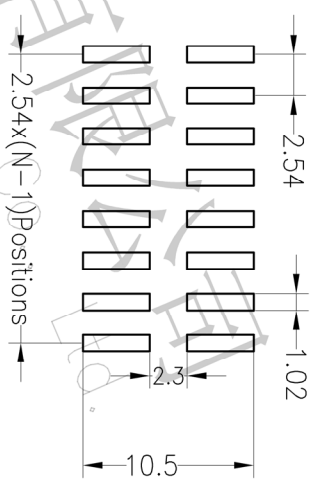


ROHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

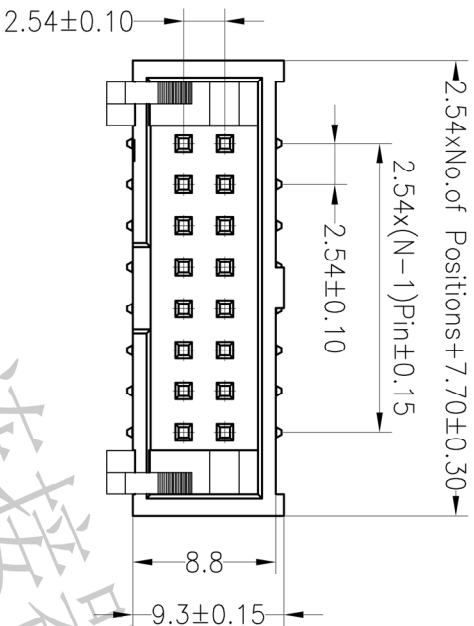

Ordering Information

J	X	XXX	X	XX	X	X	X	XXXX
---	---	-----	---	----	---	---	---	------

产品类别
J=筒牛

间距
1=1.27
2=2.0
3=2.54
4=3.96
5=5.0
6=6.0
7=5.08
A=1.27x2.54

总Pin数
016=16P

产品形态
1=DIP
2=RA
3=SMT
4=SH
5=插脚

绝缘厚度
0=常规
1=1.0"
2=2.0"
3=3.0"
SN=绝缘

塑胶材料
1=PBT
2=LCP
3=PPS
4=PA46
5=PA6T
9=PA9T

塑胶颜色
1=黑色
2=黄色
3=白色
4=蓝色
5=灰色
7=灰白色

包装方式
1=卷装
2=袋装
3=盘装
4=袋装
5=盘装

序号
0001-9999

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001					
002					

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	X.X	±0.30	UNIT	mm	A4	1/1	TITLE: 2.54mm 2*NIP 带金属钩筒牛 SMT	
X.XX	±0.20	CHECK		SIZE	A4	SHEET		PART NO.	
X.XXX	±0.10	CHECK		ANGLE	±3°	APPROVE		TITLE:	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	PROJ.	TITLE:	
1	2014.05.26	NEW DRAWING		1				2.54mm 2*NIP 带金属钩筒牛 SMT	