


# RoHS

## SPECIFICATIONS

Rated Current: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: LCP  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

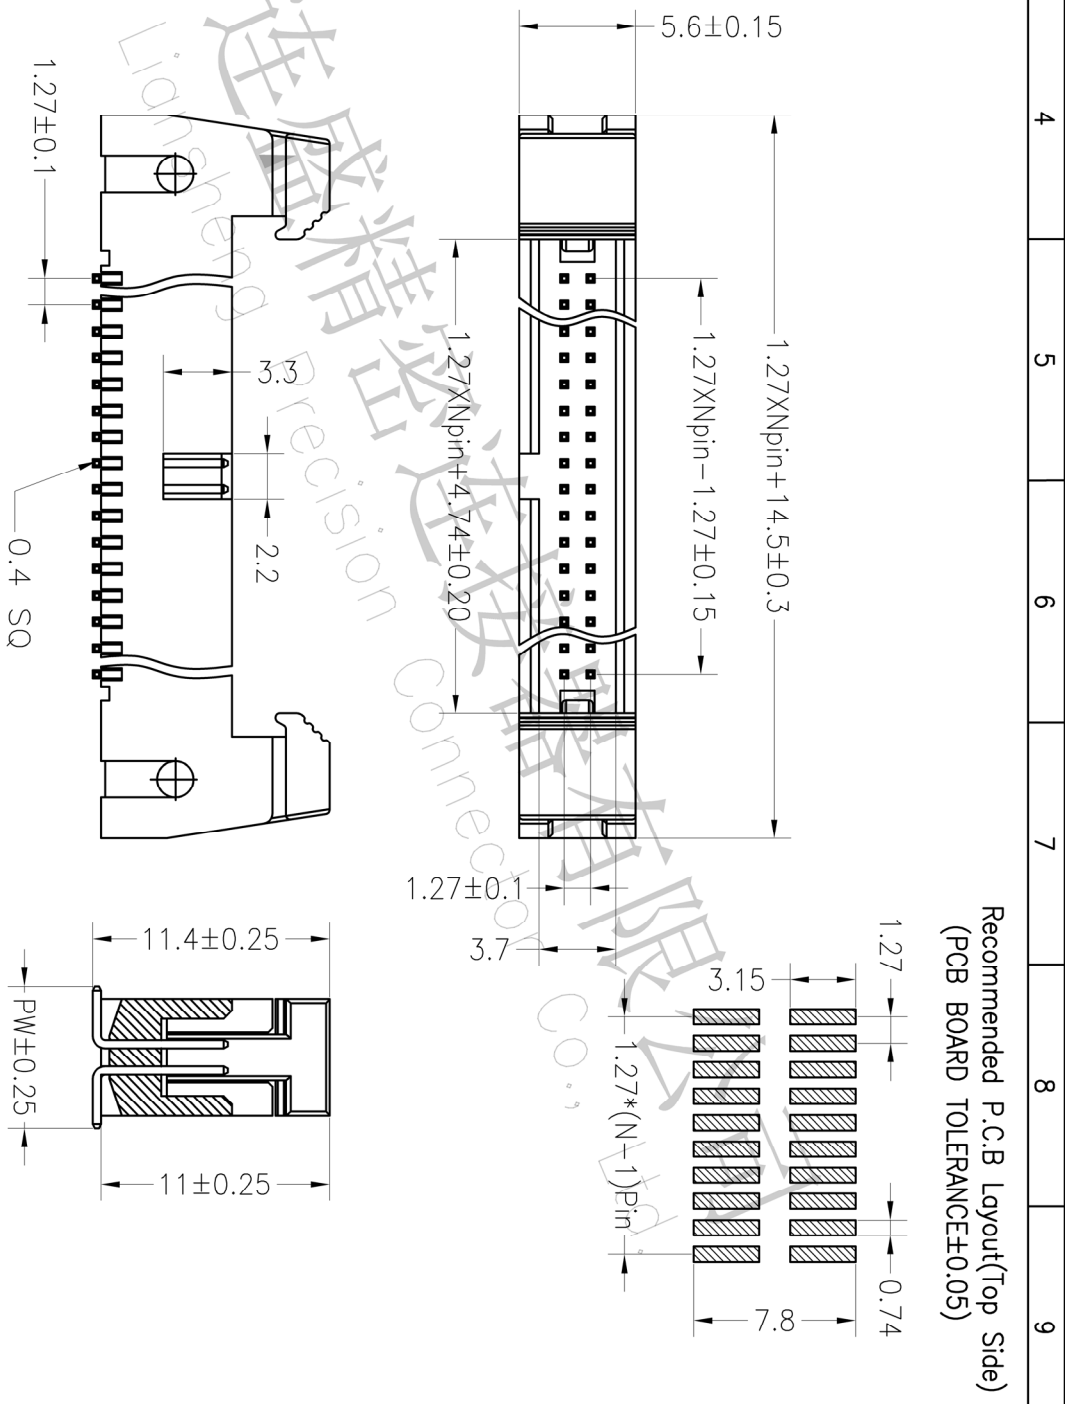

## Ordering Information

N	X	XXX	X	XX	X	X	X	XXXX
产品类型	间距	总Pin数	产品形态	绝缘厚度	塑胶材料	塑胶颜色	特殊选择	序列号
N=半角	1=1.27	016=16P	1=0-TP	0=常规	1=PBT	1=黑色	1=标准	0001-9999
2=2.0	2=RA		1=0-TP	01=1.0*	2=PCB	2=米色	2=长耳	
3=2.54	2=RA		2=0-2.0*	3=PPS	3=白色	3=短耳	3=短耳	
4=3.96	4=SH		3=0.3-0.3	4=PA66	4=白色	4=红色	4=中耳	
5=1.0	5=SH		SN=镀锌	5=PA6T	5=红色	5=红色	5=中耳	
6=0.8	6=SH			6=PA6T	6=红色	6=红色	6=中耳	
7=5.08	7=SH			7=PA6T	7=红色	7=红色	7=中耳	
8=1.27	8=SH							
9=1.27	9=SH							

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.	TITLE:
A0	2012.10.05	NEW DRAWING		X.X ±0.30	CHECK	mm	A4		
1				X.XXX ±0.10	APPROVE	mm	1/1		1.27EDH NP SMT

**深圳市连盛精密连接器有限公司**  
 Shenzhen Liansheng Precision Connector Co., Ltd.