


RoHS

SPECIFICATIONS

Rated Current: 0.75AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PAgT
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

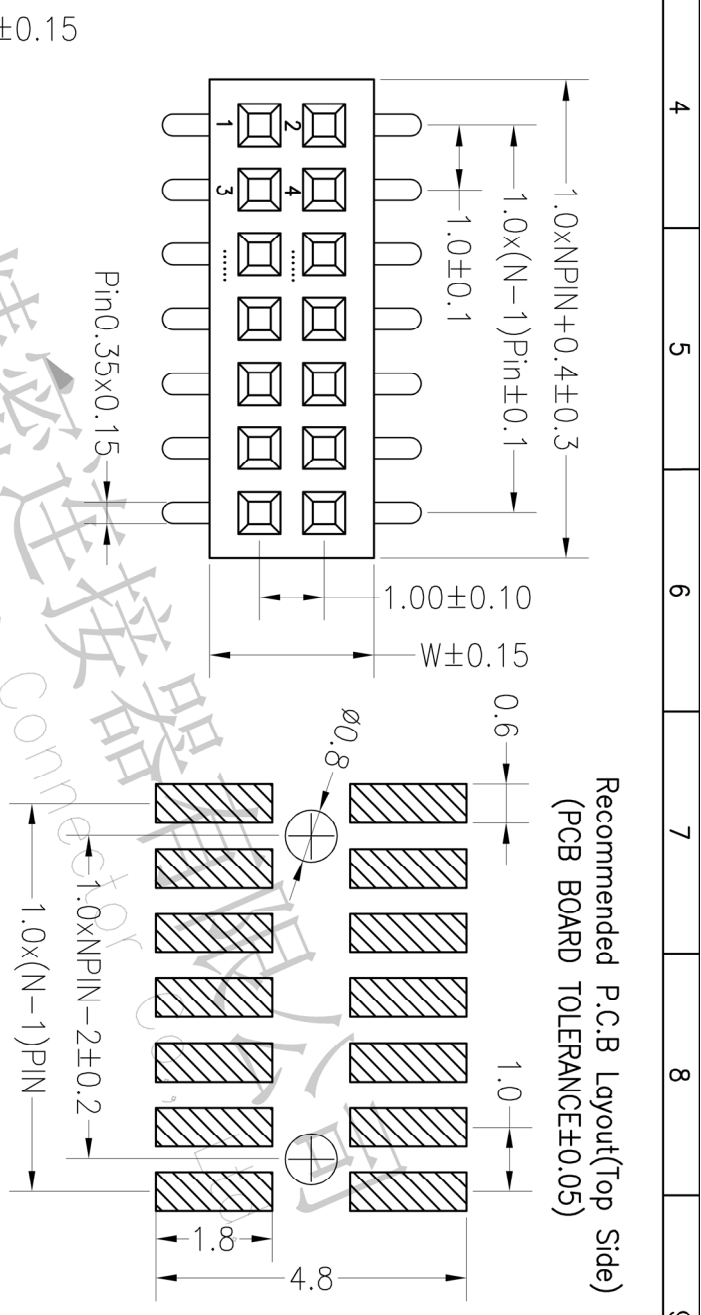

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

F	X	A	X	XX	X	XX	X	XXXX
产品类型	间距	塑胶高度	排数	单排PIN数	产品形态	塑胶材料	电镀厚度	包装方式
F=非母	1=1.27	A=2.0	1=单排	1-40P	1=DIP	1=PBT	00=常规	1=管装
	2=2.0		2=双排		2=NA	2=ICP	01=1H	2=卷装
	3=2.54		3=三排		3=SMT	3=BPS	02=2H	3=盘装
	4=3.96		4=四排		4=SH	4=RA6	03=3H	4=袋装
	5=1.0				5=载数据	5=PA6	04=4H	5=盒装
	6=0.8					9=PA9T	SN=镀锡	
	7=5.08							
	A=1.27*2.54							

Dimension antitheses list

ITEM	PB	PC	PW	H	W	L
001	2.30	3.8	2.0	2.54		

Alternate

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm			深圳市连盛精密连接器有限公司	
X.XX	±0.20	CHECK		SIZE	A4			Shenzhen Liansheng Precision Connector Co., Ltd.	
X.XXX	±0.10			SHEET	1/1			1.0FH 2XNP SMT H=2.1	
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.