
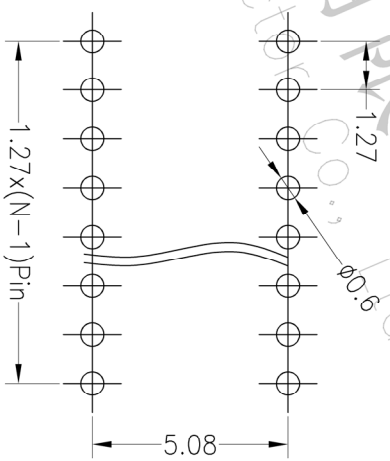
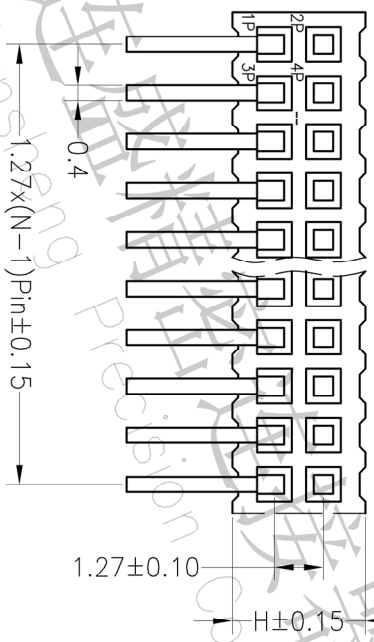



RoHS

SPECIFICATIONS
 Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

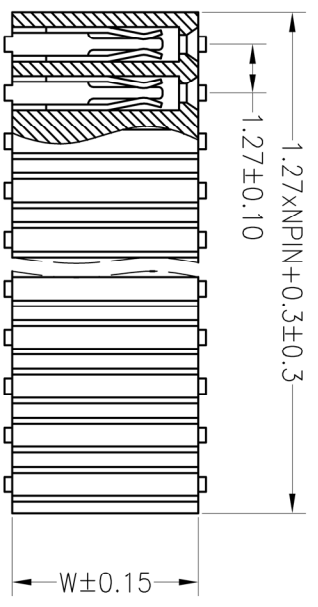


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

Ordering Information

F	X	Q	X	XX	X	XX	X	XXXX	
产品类型 F-排母	间距 1-1.27 2-2.0 3-2.54 4-3.96 5-1.0 6-0.8 7-5.08 A=1.27*2.54	塑胶厚度 O=3.4	排数 1=40Pin 2=46Pin 3=52Pin 4=58Pin	单排PIN数 1=40P	产品形态 1=DP 2=RP 3=SP 4=SI 5=板贴 6=侧插SMT 7=侧插90度	塑胶材料 1=PBT 2=LCP 3=PPS 4=PA6 5=PA6I 9=PA9I	绝缘厚度 1=0.1mm 2=0.15mm 3=0.2mm 4=0.3mm 5=侧插 9=侧插	包装方式 1=管装 2=卷装 3=盘装 4=袋装 5=盒装	序列号

ITEM	PB	PC	PW	H	W	L
001		2.70	5.08	3.45	4.83	
002						



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	X.X	±0.20	UNIT	mm	A4	1/1	1.27FH 2XNP 侧插 90度 H=3.5	
X.XXX	±0.10	CHECK		SIZE	A4	SHEET		TITLE:	
Angle	±3°	APPROVE		PROJ.		PRD.			
DIM	TOL	CHANGE		DIM		TOL			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE		DIM			
A0	2012.04.18	NEW DRAWING							
1									