
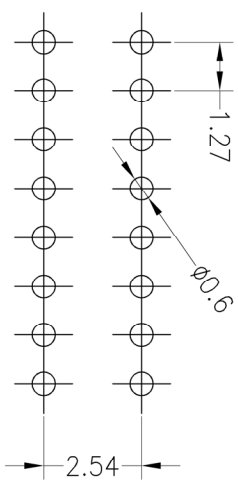


ROHS



SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

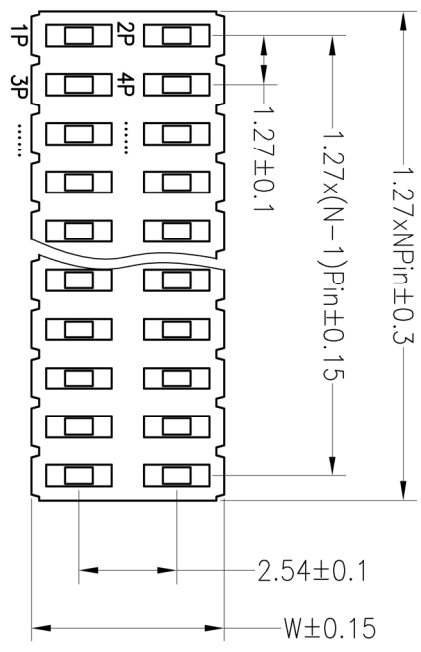

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

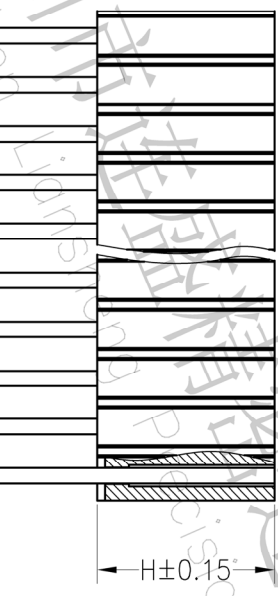

Ordering Information

F X E X XX X X XX X XXXX
 产品规格 间距 塑胶高度 排数 导体材质 产品形态 塑胶材料 电镀厚度 包装方式
 F=排数 1=1.27 E=4.6 1=单排 1=0P 1=PBT 00=弯脚 1=管装
 2=双排 2=0P 2=LCP 01=直插 2=卷装
 3=54 3=SMT 3=PPS 02=插 3=盘装
 4=96 4=插排 4=SH 03=3A 4=盘装
 5=1.0 5=插排 5=PPS 03=3A 5=盘装
 6=0.8 6=插排 6=SH 03=3A 6=盘装
 7=5.08 7=插排 7=SH 03=3A 7=盘装
 A=1.27±0.25 7=侧插SMT 9=PA6T

深圳连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

ITEM	PB	PC	PW	H	W	L
001		3.00		4.6	5.0	
002						



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.
X.X	±0.30	DRAW	CHECK	UNIT	mm	mm	A4	
X.XX	±0.20			SIZE				1.27x2.5FH 2XNP 180度 H=4.6
X.XXX	±0.10			SHEET			1/1	
Angle	±3°	APPROVE		PROJ.				
DIM	TOL							
CHANGE								
MODIFICATION DESCRIPTION								
DATE								
REV								
A0	2012.04.18	NEW DRAWING						