





ROHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

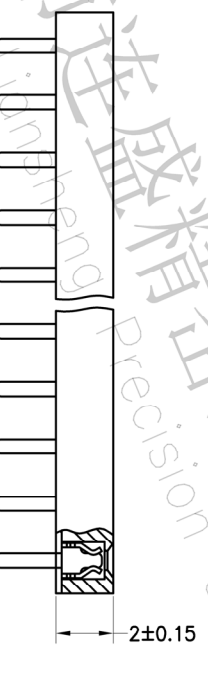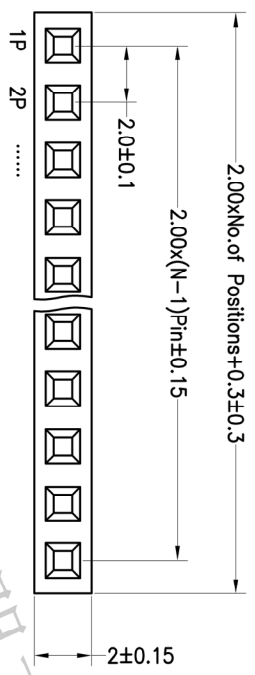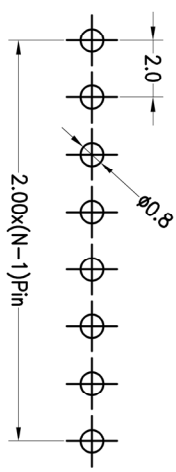

Ordering Information

F	X	D	X	XX	X	X	XX	X	XXXX
产品型号	008	008	008	008	008	008	008	008	008
产品长度	1.27	1.27	1.27	1.27	1.27	1.27	1.27	1.27	1.27
产品宽度	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43
产品厚度	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
产品重量	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
产品材料	PA6T	PA6T	PA6T	PA6T	PA6T	PA6T	PA6T	PA6T	PA6T
产品表面处理	1=HT	1=HT	1=HT	1=HT	1=HT	1=HT	1=HT	1=HT	1=HT
产品绝缘材料	3=PS	3=PS	3=PS	3=PS	3=PS	3=PS	3=PS	3=PS	3=PS
产品颜色	4=PA6T	4=PA6T	4=PA6T	4=PA6T	4=PA6T	4=PA6T	4=PA6T	4=PA6T	4=PA6T
产品包装	5=TR	5=TR	5=TR	5=TR	5=TR	5=TR	5=TR	5=TR	5=TR
产品认证	6=UL94V-0	6=UL94V-0	6=UL94V-0	6=UL94V-0	6=UL94V-0	6=UL94V-0	6=UL94V-0	6=UL94V-0	6=UL94V-0
产品日期	7=2012.04.18	7=2012.04.18	7=2012.04.18	7=2012.04.18	7=2012.04.18	7=2012.04.18	7=2012.04.18	7=2012.04.18	7=2012.04.18

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm			深圳市连盛精密连接器有限公司	
X.XX	±0.20	CHECK		SIZE	A4	Shenzhen Liansheng Precision Connector Co., Ltd.			
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.					
DIM	TOL							TITLE: 2.0FH H2.0mm 1xNpin 180°	



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	SCALE		FIT		PART NO.	
A0	2012.04.18	NEW DRAWING		UNIT	mm			深圳市连盛精密连接器有限公司	
1				SIZE	A4	Shenzhen Liansheng Precision Connector Co., Ltd.			
				SHEET	1/1				
				PROJ.					
								TITLE: 2.0FH H2.0mm 1xNpin 180°	