


ROHS




SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:−40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: P6T
 Max.Processing Temp: 230°C for 30–60 seconds
 (260°C for 10 seconds)


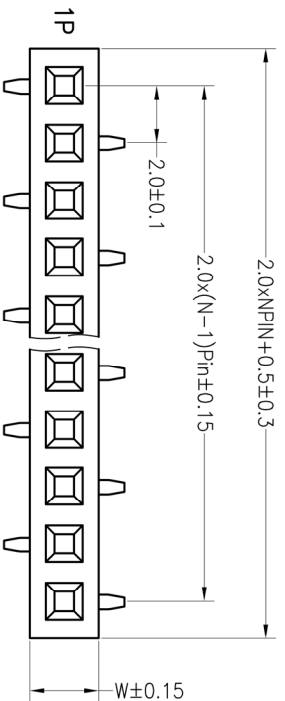


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

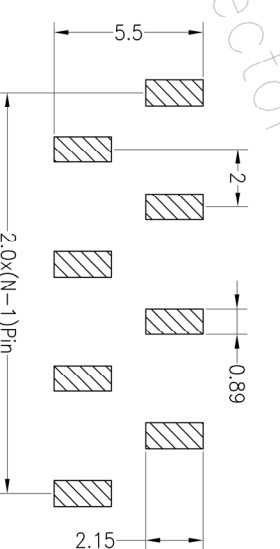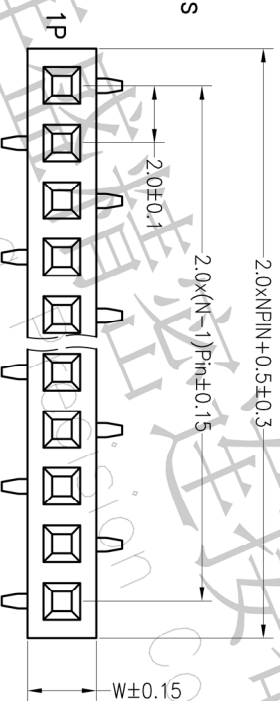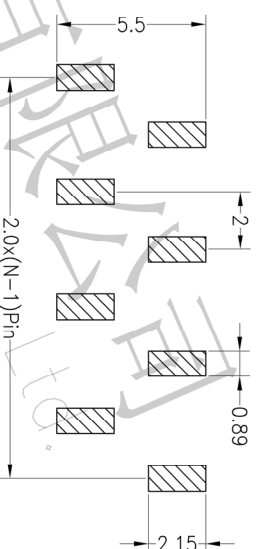

Ordering Information

F	X	D	X	XX	X	XX	X	XXXX
Pin 1 2 3 4 5 6 7 8 9 10	Pin 1 2 3 4 5 6 7 8 9 10	Pin 1 2 3 4 5 6 7 8 9 10	Pin 1 2 3 4 5 6 7 8 9 10	Pin 1 2 3 4 5 6 7 8 9 10	Pin 1 2 3 4 5 6 7 8 9 10	Pin 1 2 3 4 5 6 7 8 9 10	Pin 1 2 3 4 5 6 7 8 9 10	Pin 1 2 3 4 5 6 7 8 9 10

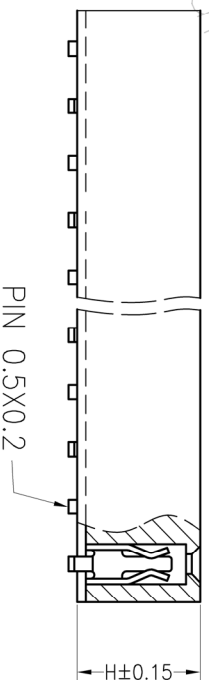

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001	4.5		4.2	4.3	2.4
002					

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm		A4	2.0FH 1XNP SMT H=4.3	
X.XX	±0.20	CHECK		SIZE	A4	SHEET		TITLE:	
X.XXX	±0.10	APPROVE		ANGLE	±3°	PROJ.			
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL				
A0	2012.04.18	NEW DRAWING							
1		CHANGE							