


RoHS


SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)


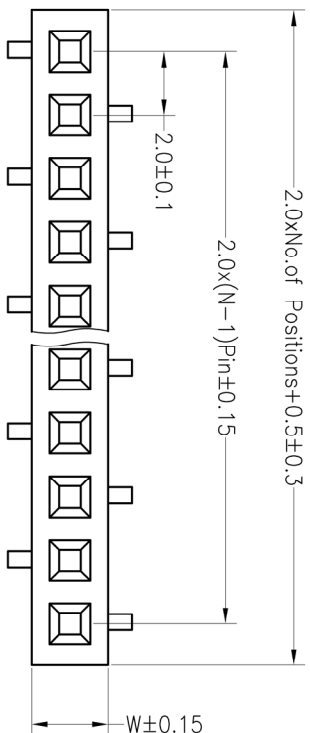


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

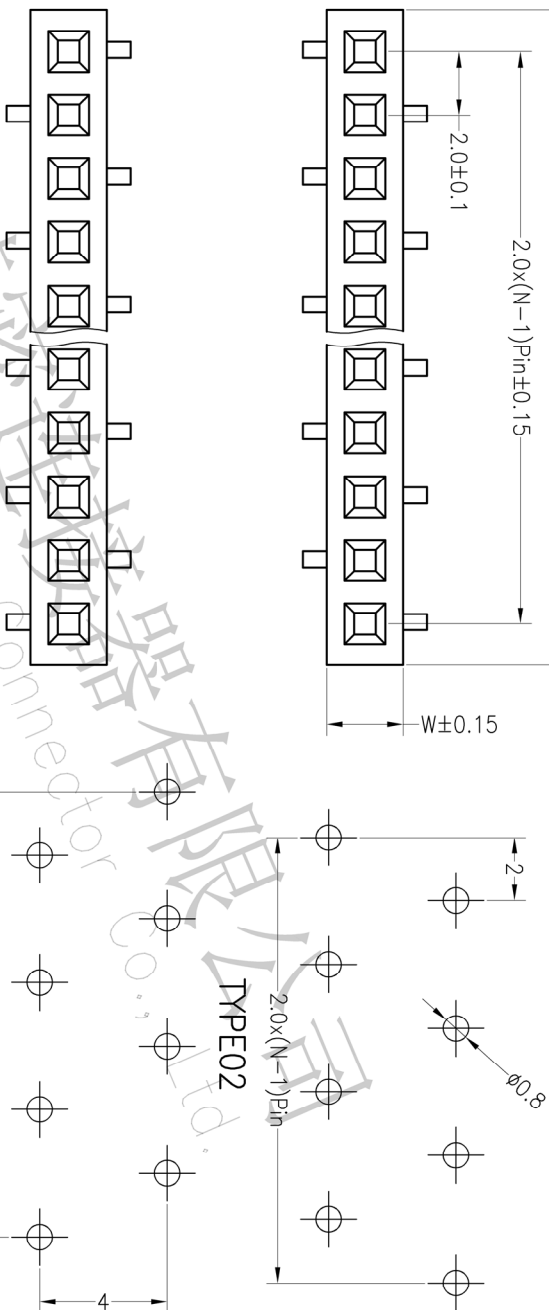


Ordering Information

F	X	X	X	XX	X	XX	X	XXXX
产品类别 F-系列	间距 2.0	板厚 E=1.5	插脚 2-2.54	焊盘间距 1-2.0	插脚材料 2-BR	绝缘材料 3-PA66	绝缘厚度 4-0.3	包装形式 1-卷盘
零件号 2-2.54 5-1.0 6-1.8 A-127-2.54			插脚 2-2.54 3-2.54 4-插脚	焊盘间距 1-2.0	插脚材料 2-BR	绝缘材料 3-PA66	绝缘厚度 4-0.3	包装形式 1-卷盘 2-插架 3-插架 4-卷盘 5-插架 6-插架 7-插架 8-插架 9-插架

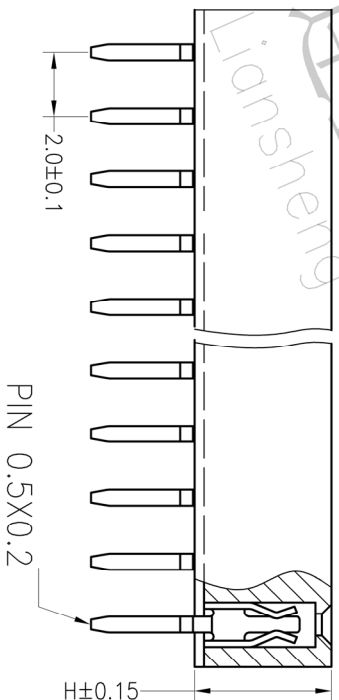

Dimension notches list					
ITEM	PB	PC	PW	H	W
001		3.0	4.0	4.3/4.6	2.4
002					



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	X.X	±0.30	UNIT	mm	mm	A4	SIZE	A4
X.XX	±0.20	CHECK		SHEET		1/1		SHEET	
X.XXX	±0.10	APPROVE		PROJ.		1/1		TITLE:	
Angle	±3°	CHANGE		DIM		TOL		2.0FH 1xNpin 嵌线脚	
A0	2012.04.18	NEW DRAWING		MODIFICATION DESCRIPTION		DATE		REV	
1	2	3		4		5		6	
1	2	3		4		5		6	