
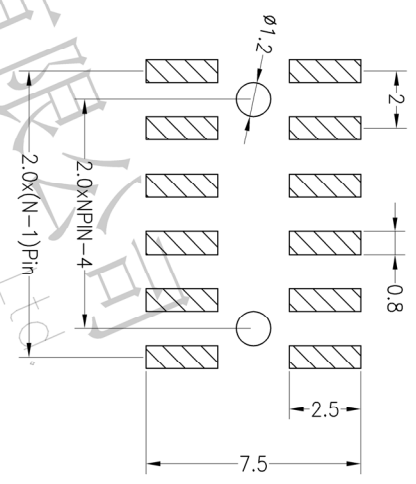




1 ROHS

7 Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

2 SPECIFICATIONS
3 Rated Current:1.5AMP
4 Contact Resistance:20mΩ Max
5 Withstand Voltage:500V AC/DC
6 Insulation Resistance:1000MΩ Min
7 Operation Temperature:−40°c to +105°c

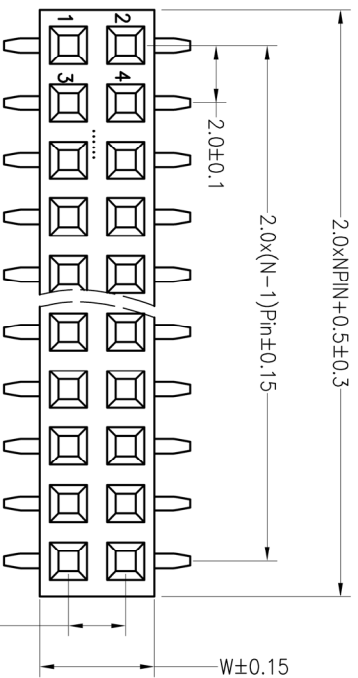

8 Contact Material:Brass
9 Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

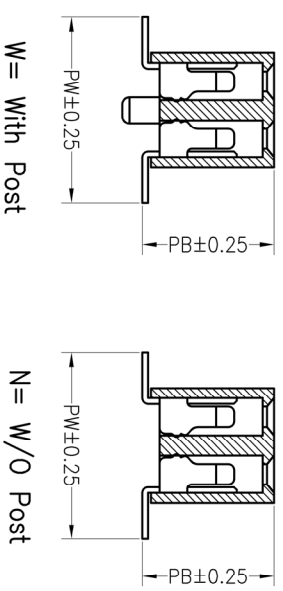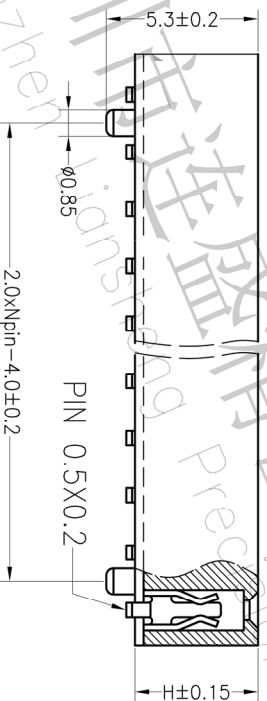

Ordering Information

F	X	D	X	XX	X	X	XX	X	XXXX
产品规格	插孔	间距	插孔间距	产品规格	插孔材料	插孔镀层	插孔厚度	插孔形式	零件号
1-100	1-2	2.0	2.0	1-40	2-10	2-10	2-10	2-10	2-10
产品规格	插孔	间距	插孔间距	产品规格	插孔材料	插孔镀层	插孔厚度	插孔形式	零件号
D=4.3	1-2	2.0	2.0	1-40	2-10	2-10	2-10	2-10	2-10

Dimension orthliness list					
ITEM	PB	PC	PW	H	W
001	4.6	6.2	4.3	4.0/4.5	
002			6.5		

深圳市连盛精密连接器有限公司
Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.		
X.X	±0.30	X.X	±0.30	UNIT	mm	A4	1/1	2.0FH 2XNP SMT H=4.3		
X.XX	±0.20	CHECK		SIZE	A4	SHEET		TITLE:		
X.XXX	±0.10	CHECK		APPROVE		PROJ.				
Angle	±3°	APPROVE								
DIM	TOL	APPROVE								
CHANGE	MODIFICATION DESCRIPTION		CHANGE		DATE		REV			
1	2	3	4	5	6	7	8	9		