


RoHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c



Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

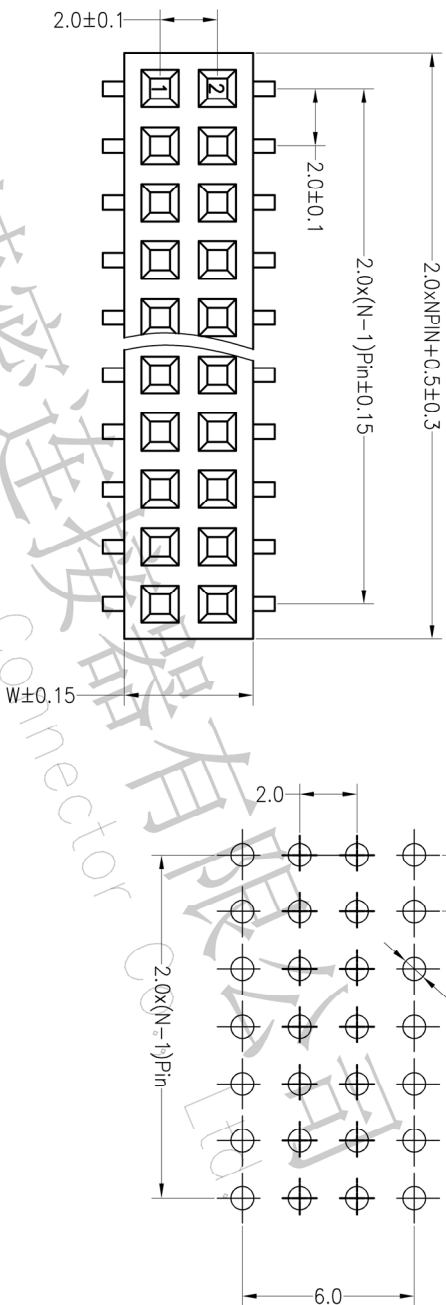

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

F	X	X	X	XX	X	XX	X	XXXX
产品型号	长度	间距	插孔间距	插孔直径	电导体直径	电导体长度	绝缘体厚度	零件号
F=1FH	14.27	D=4.3	14.48	1.4	1=3PT	0.07±0.02	1=3.0	
	3.25	E=4.8	14.48	1.4	2=2PT	0.11±0.02	2=3.0	
	4.43		14.48	1.4	3=1PT	0.11±0.02	3=3.0	
	6.04		14.48	1.4	4=PA6T	0.11±0.02	4=3.0	
	6.64		14.48	1.4	5=PA6T	0.11±0.02	5=3.0	
	8.25		14.48	1.4	6=PA6T	0.11±0.02	6=3.0	
	11.27		14.48	1.4	7=PA6T	0.11±0.02	7=3.0	

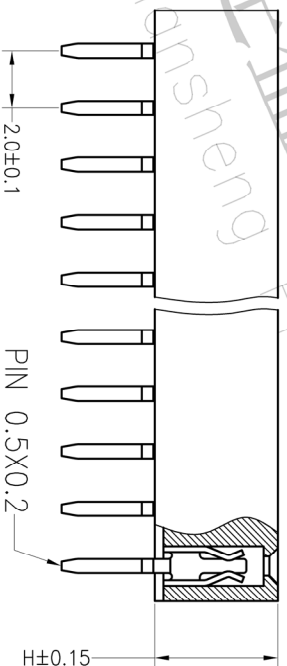

Dimension notations list					
ITEM	PB	PC	PW	H	W
001		3.0	6.0	4.3/4.6	4.0/4.5
002			5.0		

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4	SHEET		TITLE:	
X.XXX	±0.10			ANGLE	±3°	PROJ.		2.0FH 2XNP 蝶螺脚	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE					
1	2012.07.23	NEW DRAWING							