
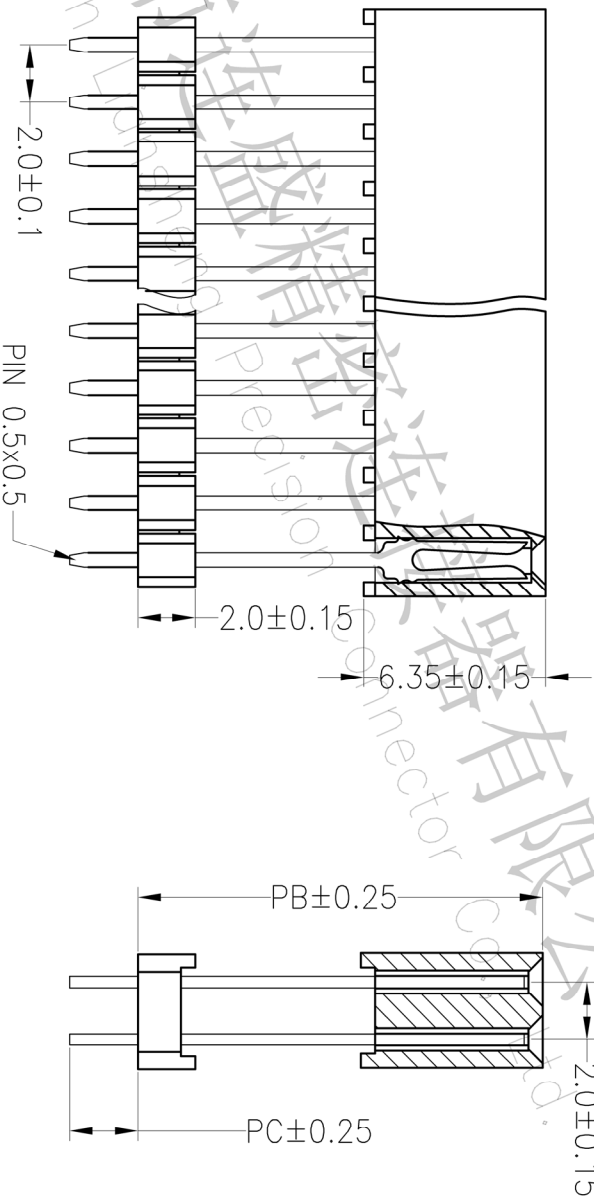
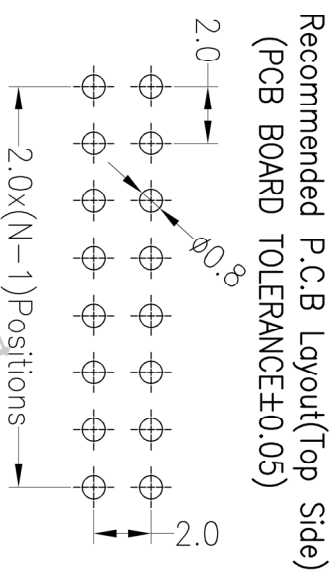


ROHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

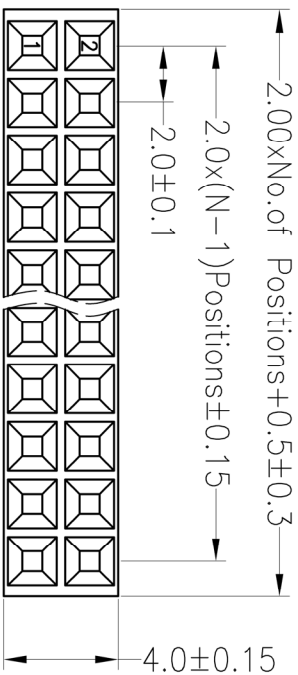

Ordering Information

F	X	R	X	XX	X	XX	X	XXXX
产品系列	间距	接触高度	接触长度	产品长度	接触材料	绝缘材料	表面处理	系列号
2-2.54	2.54	Re-6.35	1-4.00	1-6.35	1-Au	1-0.05	1-0.05	
3-2.54	3.18	3-5.08	3-5.08	3-5.08	3-Sn	3-0.05	3-0.05	
4-2.54	4.75	4-6.35	4-6.35	4-6.35	4-Au	4-0.05	4-0.05	
5-2.54	5.08	5-6.35	5-6.35	5-6.35	5-Pb	5-0.05	5-0.05	
6-2.54	6.35	6-6.35	6-6.35	6-6.35	6-PA6T	6-0.05	6-0.05	
A=1.27±0.51								

ITEM	PB	PC	PW	H	W
001	15.0	2.8			
002					

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4				
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								
OPERATION		DRAW		SCALE		FIT		PART NO.	
DRAW		CHECK		APPROVE		TITLE:		2.0FH 2xNp 180度 加胶型	
DATE		MODIFICATION DESCRIPTION		CHANGE		TITLE:		2.0FH 2xNp 180度 加胶型	
2012.04.18		NEW DRAWING				TITLE:		2.0FH 2xNp 180度 加胶型	
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		TITLE:	
1									