

RoHS




SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

Ordering Information

F	X	N	X	XX	X	X	XX	X	XXXX
产品类型 1=27 2=20 3=254 4=396 5=10 6=08 7=508 A=127*254	间距 N=8.5	排数 1=1排 2=2排 3=3排 4=4排	每排PIN数 1~40	产品形态 1=DI 2=RA 3=SMT 4=SH 5=垂直插 6=侧插SMT 7=侧插90度	绝缘材料 1=PBT 2=LCP 3=PPS 4=PA6 5=PA9T	电镀厚度 00=常规 01=10° 02=20° 03=30° SN=镀锡	包装方式 1=卷装 2=盘装 3=盒装 4=终接 5=散装	序号号 XXXXX	

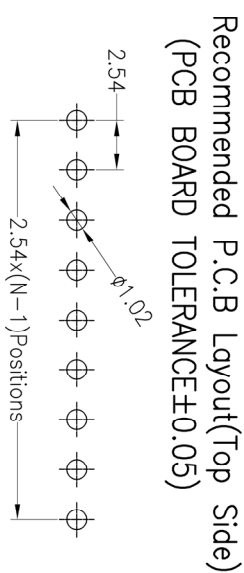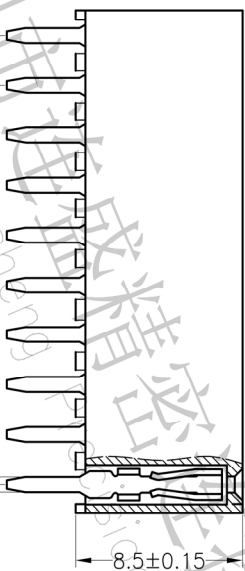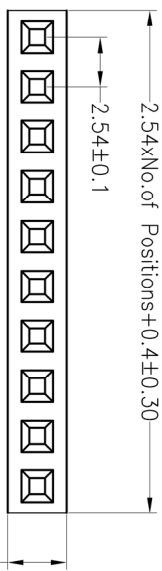


2.54x(N-1) Positions±0.15

PIN 0.76*0.30

3.5±0.25

OPERATION		DRAW		SCALE		FIT	
X.X	±0.30			UNIT	mm		
X.XX	±0.20	CHECK		SIZE	A4		
X.XXX	±0.10			SHEET	1/1		
Angle	±3°	APPROVE		PROJ.			
DIM	TOL						



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

PART NO.		TITLE:	
2.54FH H8.5mm 1xNpin 180° 0-Type			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	
1			