


RoHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°c to +105°c

Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

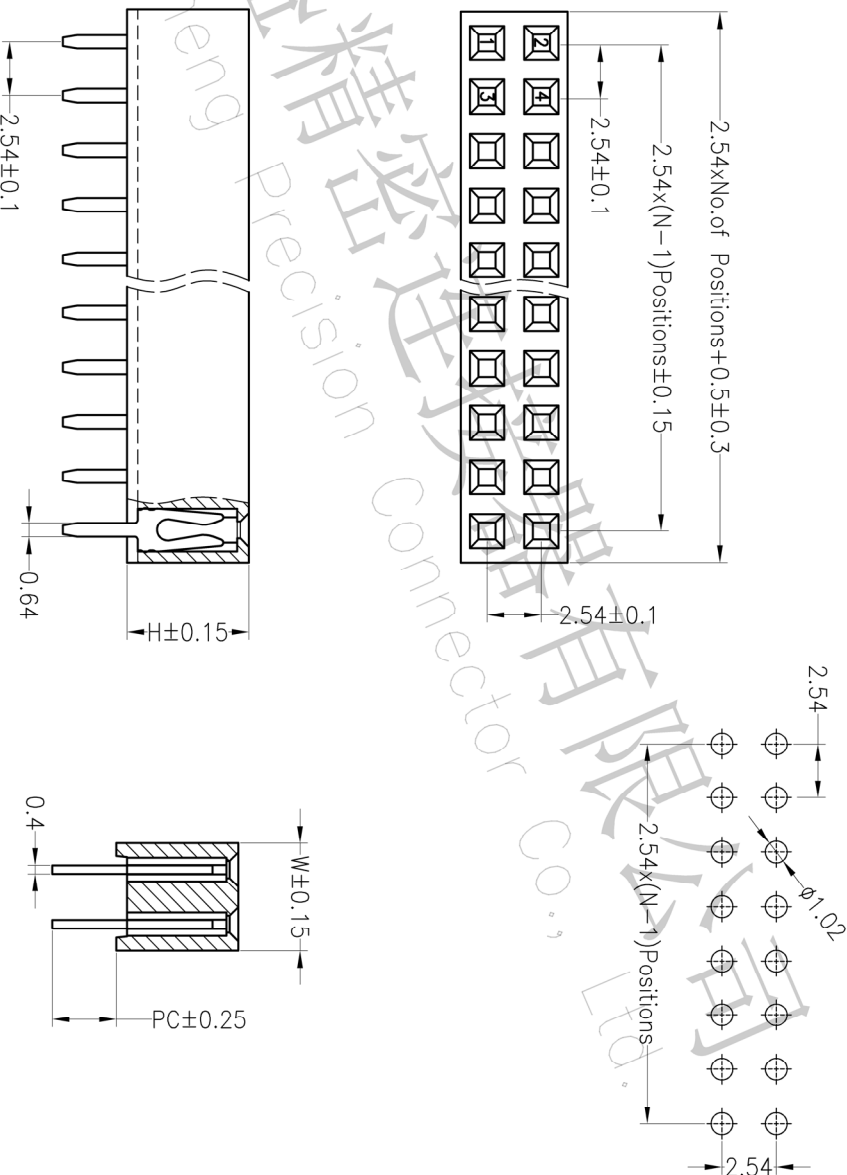

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

F	X	X	X	XX	X	X	XX	X	XXXX
产品型号	插孔	插距	插距公差	产品长度	插孔材料	插孔厚度	插孔直径	插孔方式	序号
F=11#	1-1.27	G=5.7	1-±0.1	1-40P	1-PBT	0.1-0.25	0.1-1.0"	1-管脚	
	3-2.54			2-40P	2-PCB	0.1-0.25	0.1-1.0"	2-管脚	
	4-3.96			3-50P	3-SMT	0.1-0.25	0.1-1.0"	3-管脚	
	5-1.27			4-50P	4-PCB	0.1-0.25	0.1-1.0"	4-管脚	
	6-1.27			5-50P	5-PBT	0.1-0.25	0.1-1.0"	5-管脚	
	7-5.08			7-插脚间距	9-PBT			9-管脚	
	A=1.27±0.254								

Dimension antitheses list

ITEM	PB	PC	PW	H	W
001		3.0		5.7	
002					5.0



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm			SIZE	A4
X.XX	±0.20	CHECK		SHEET	1/1	TITLE:		PROJ.	
X.XXX	±0.10	APPROVE							
Angle	±3°								
DIM	TOL								
REV	DATE	MODIFICATION DESCRIPTION	CHANGE						
A0	2012.04.26	NEW DRAWING							
1									

2.54FH H5.7mm 2xNpin 180° DIP