
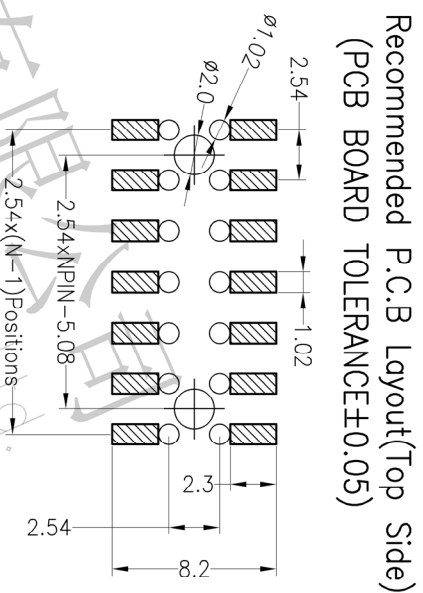


RoHS

SPECIFICATIONS



Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

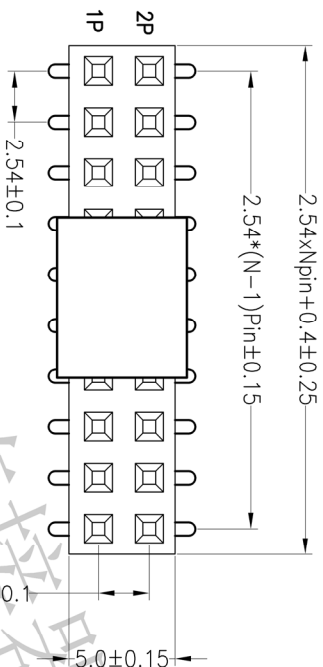

Ordering Information

F	X	S	X	XX	X	XX	X	XXXX	
产品选型 F=非母	间距 1=1.27 2=2.0 3=2.54 4=3.86 5=5.0 7=5.08 A=1.27*2.54	塑胶高度 S=3.55	排数 1=单排 2=双排 3=三排 4=四排	单排PIN数 1=4P	产品形态 1=DP 2=PA 3=SM 4=SH	塑胶材料 1=PBT 2=CP 3=PS 4=PA66 5=PA6T 9=PA9T	电镀厚度 00=常规 01=1μ 02=2μ 03=3μ SW=镀锡	包装方式 1=管装 2=卷装 3=盘装 4=袋装 5=盒装	序列号

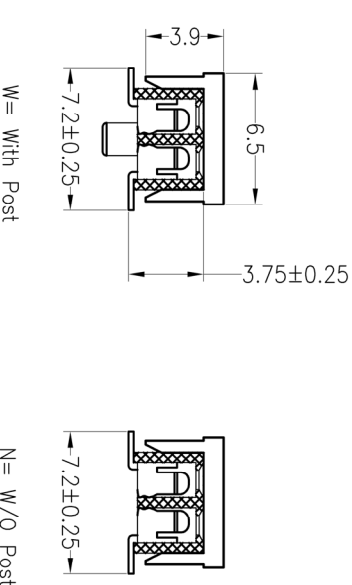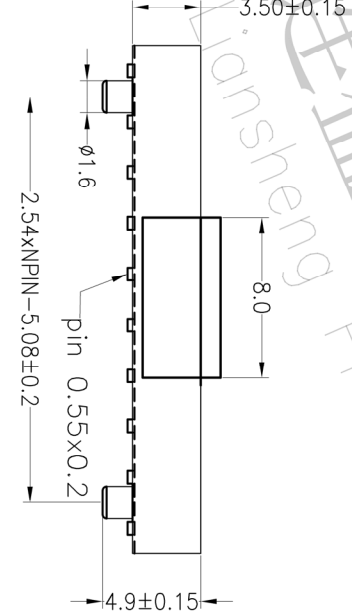

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	X.XX	±0.20	X.XX	±0.10	X.XXX	±0.10	Angle	±3°
X.XXX	±0.10	Angle	±3°	DIM	TOL	APPROVE	PROJ.	TITLE:	2.54FH H3.5mm 2xNpin SMT
CHANGE		CHANGE		CHANGE		CHANGE		CHANGE	
REV	DATE	MODIFICATION DESCRIPTION	DATE	MODIFICATION DESCRIPTION	DATE	MODIFICATION DESCRIPTION	DATE	MODIFICATION DESCRIPTION	DATE
A0	2012.03.28	NEW DRAWING							
1									

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.