


# RoHS

## SPECIFICATIONS

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

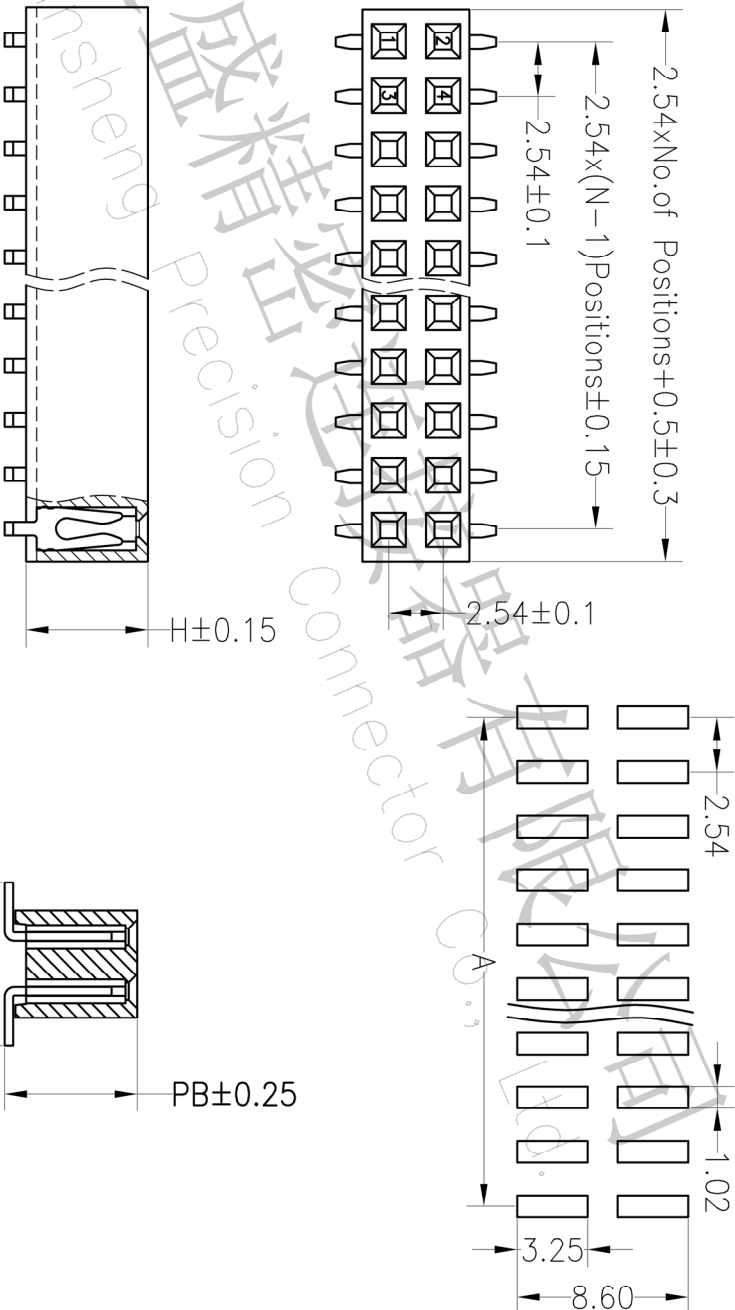

## Ordering Information

产品型号	插孔	间距	产品形态	绝缘材料	电镀层	电镀厚度	包装方式	序列号
产品号	2xN	2.54	2=PA 3=SMT 4=PM6 5=PM1 7=插板型	2=PA 3=SMT 4=PM6 5=PM1 7=插板型	0=无镀 0.1=0.1μm 0.2=0.2μm 0.3=0.3μm	1=管装 2=卷装 3=插装 4=穿装 5=盒装	1=管装 2=卷装 3=插装 4=穿装 5=盒装	
2=2.54	G=5.7	2=间距	2=PA	2=PA	0=无镀	1=管装	1=管装	
5=1.02		3=三排	3=SMT	3=SMT	0.1=0.1μm	2=卷装	2=卷装	
9=0.8		4=四排	4=PM6	4=PM6	0.2=0.2μm	3=插装	3=插装	
7=3.98 2=2.54		7=插板型	5=PM1	5=PM1	0.3=0.3μm	4=穿装	4=穿装	

Dimension antitheses list

ITEM	PB	PC	PW	H	W
001	6.2		8.0	5.7	5.0
002			7.0		



深圳市连盛精密连接器有限公司  
 Shenzhen Liansheng Precision Connector Co., Ltd.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.	TITLE:
A0	2014.04.26	NEW DRAWING		X.X ±0.30 X.XX ±0.20 X.XXX ±0.10	CHECK	UNIT mm SIZE A4	1/1		2.54FH H5.7mm 2xNpin SMT
1				Angle ±3° DIM TOL	APPROVE	SHEET 1/1 PROJ.			