


RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

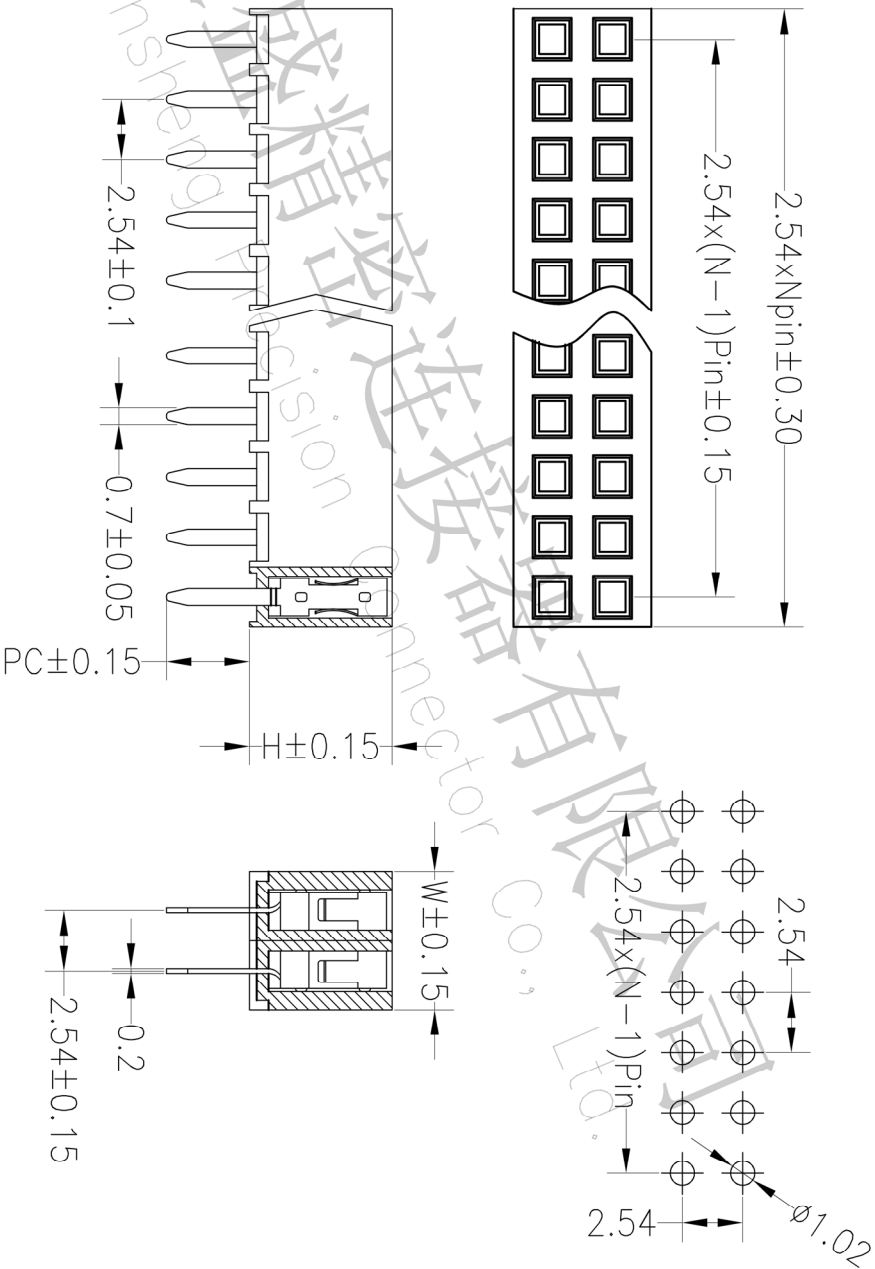

Ordering Information

F	X	H	X	XX	X	X	XX	X	XXXX
产品型号 F=排号	间距 H=6.0	排数 1=6排	封装形式 1=40P	产品形态 1=CPA	绝缘材料 1=PBT	电镀材料 00=密镀	电镀厚度 01=1μm	包装方式 1=卷装	序列号
2=2.5	2=2.5	2=2.5	2=2.5	2=FA	2=LCP	02=2μm	2=卷装	2=卷装	
3=3.0	3=3.0	3=3.0	3=3.0	3=SM	3=PPS	03=3μm	3=卷装	3=卷装	
4=4.0	4=4.0	4=4.0	4=4.0	4=SM	4=PA66	03=3μm	4=卷装	4=卷装	
5=5.0	5=5.0	5=5.0	5=5.0	5=SM	5=PA6T	SS=镀锡	5=卷装	5=卷装	
7=7.0	7=7.0	7=7.0	7=7.0	7=SM	3=PA6T	SS=镀锡			

Dimension antitheses list

ITEM	PB	PC	PW	H	W
001		3.3		6.0	5.8
002					



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION	DRAW	SCALE	FIT	PART NO.
X.X		UNIT	mm	
X.XX	CHECK	SIZE	A4	
X.XXX		SHEET	1/1	
Angle	APPROVE	PROJ.		TITLE:
±3°				2.54FH 2xNPin H6.0 W5.8 180°
DIM	TOL			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	
1			