


# RoHS




## SPECIFICATIONS

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

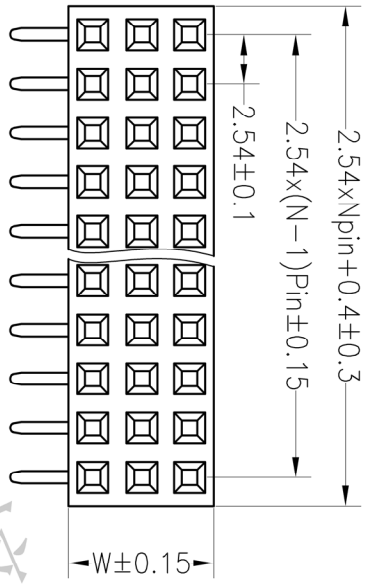

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

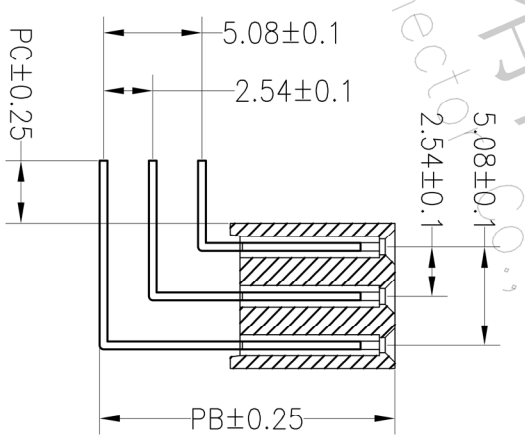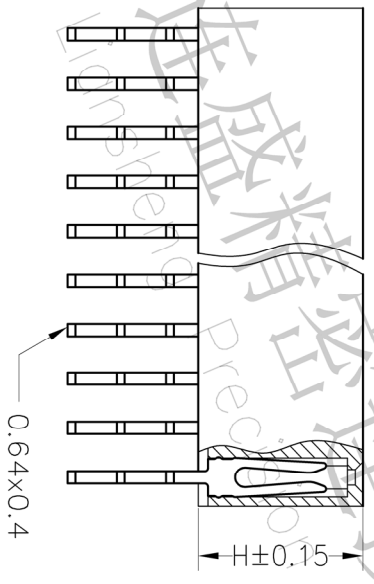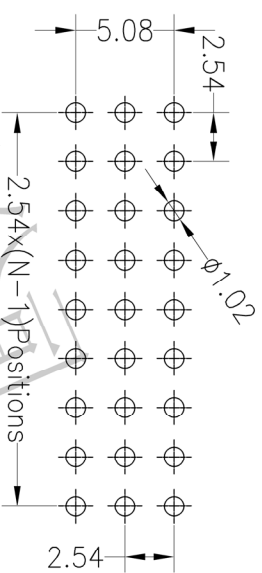

## Ordering Information

F	X	N	X	XX	X	XX	X	XXXX
产品型号	插针	插针间距	插针长度	插针间距	插针长度	插针间距	插针长度	插针间距
1-127	H=8.5	1-4.00	1-10.0	1-10.0	1-10.0	1-10.0	1-10.0	1-10.0
2-25.4		2-2.54	2-10.0	2-10.0	2-10.0	2-10.0	2-10.0	2-10.0
4-3.96		4-3.96	4-10.0	4-10.0	4-10.0	4-10.0	4-10.0	4-10.0
6-3.0		6-3.0	6-10.0	6-10.0	6-10.0	6-10.0	6-10.0	6-10.0
7-2.54		7-2.54	7-10.0	7-10.0	7-10.0	7-10.0	7-10.0	7-10.0

Dimension antitheses list

ITEM	PB	PC	PW	H	W
001	15.24	3.2		8.5	7.5
002					



深圳市连盛精密连接器有限公司  
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4				
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								
MODIFICATION DESCRIPTION		CHANGE		7		8		9	
REV	DATE			TITLE:		2.54FH H8.5mm 3xNpin 90°			
A0	2012.03.28	NEW DRAWING							
1									