




RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

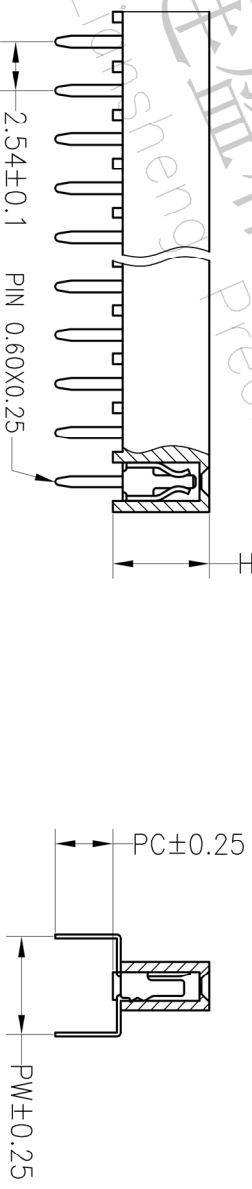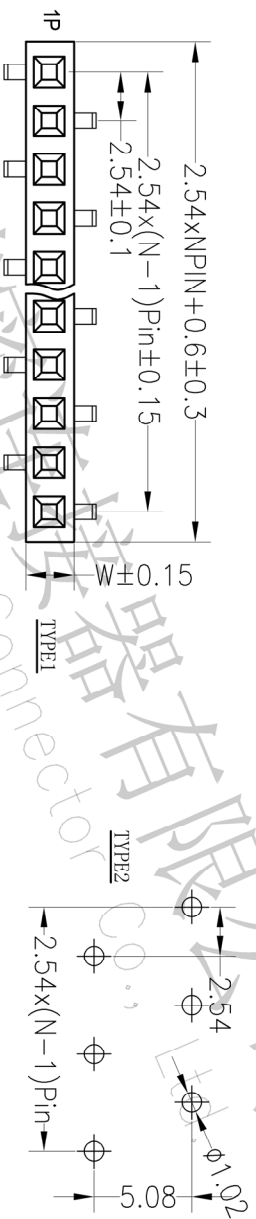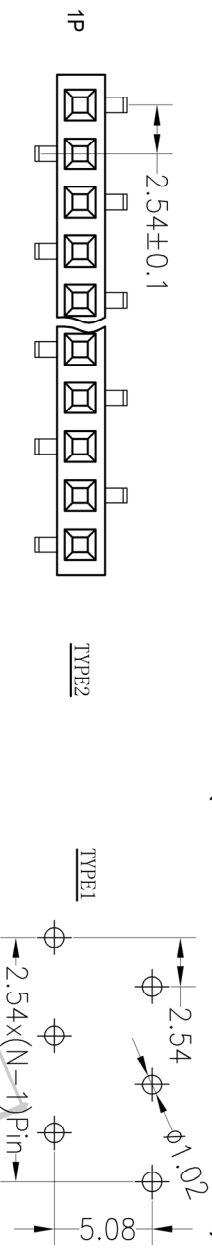

Ordering Information

F	X	F	X	XX	X	X	XX	X	XXXX
产品型号	插针	插针	插针	插针	插针	插针	插针	插针	插针
F=12Pin	1-1插针	2-2插针	3-3插针	4-4插针	5-5插针	6-6插针	7-7插针	8-8插针	9-9插针
1-1插针	2-2插针	3-3插针	4-4插针	5-5插针	6-6插针	7-7插针	8-8插针	9-9插针	
1-1插针	2-2插针	3-3插针	4-4插针	5-5插针	6-6插针	7-7插针	8-8插针	9-9插针	
1-1插针	2-2插针	3-3插针	4-4插针	5-5插针	6-6插针	7-7插针	8-8插针	9-9插针	
1-1插针	2-2插针	3-3插针	4-4插针	5-5插针	6-6插针	7-7插针	8-8插针	9-9插针	
1-1插针	2-2插针	3-3插针	4-4插针	5-5插针	6-6插针	7-7插针	8-8插针	9-9插针	
1-1插针	2-2插针	3-3插针	4-4插针	5-5插针	6-6插针	7-7插针	8-8插针	9-9插针	
1-1插针	2-2插针	3-3插针	4-4插针	5-5插针	6-6插针	7-7插针	8-8插针	9-9插针	

ITEM	PB	PC	PW	H	W
001		3.0	5.08	5.0	2.5
002					



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4	SHEET		TITLE:	
X.XXX	±0.10			ANGLE	±3°	PROJ.		2.54FH H5.0mm 1xNpin SMT W2.50	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL	APPROVE		2.54FH H5.0mm 1xNpin SMT W2.50	
1								2.54FH H5.0mm 1xNpin SMT W2.50	