


RoHS


SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)


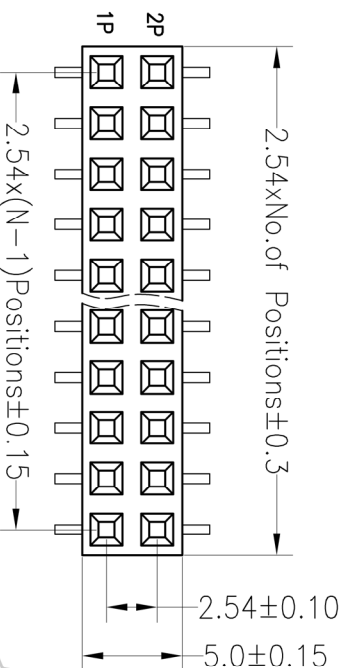


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

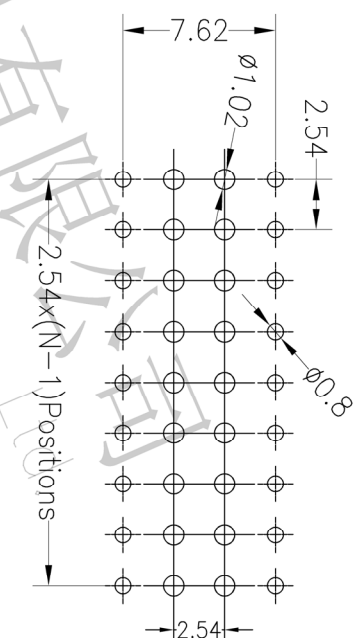


Ordering Information

F	X	S	X	XX	X	XX	X	XXXX
产品类别	间距	塑胶壳壳	材料	表面处理	产品形态	塑胶材料	电镀厚度	包装方式
F-材料号	1=1.27 2=2.0 3=2.54 4=3.96 5=1.0 6=0.8 7=3.00 A=1.27-2.54	S=3.55	1=0.1mm 2=0.2mm 3=三排 4=四排	1=40P 2=40P 3=3-SMT 4=SH 5=双排SMT 6=侧插SMT 7=侧插90度	1=0P 2=PA 3=3-SMT 4=SH 5=双排SMT 6=侧插SMT 9=PA9T	1=0.05mm 2=0.1mm 3=0.15mm 4=0.2mm 5=0.3mm 6=0.4mm 7=0.5mm 8=0.6mm 9=0.8mm	1=卷装 2=盘装 3=盘装 4=盘装 5=盘装	序列号

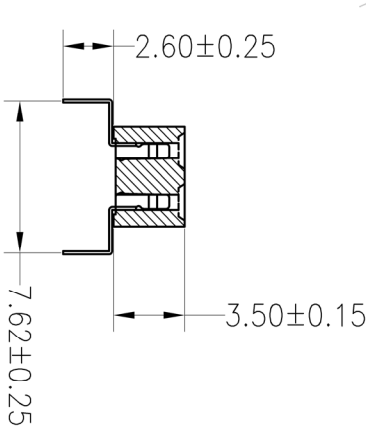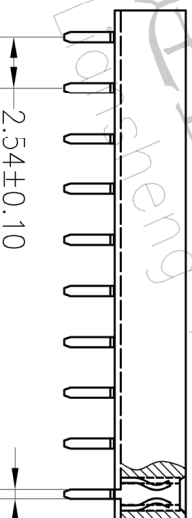

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	X.X	±0.30	UNIT	mm	mm	A4	深圳市连盛精密连接器有限公司	
X.XX	±0.20	CHECK		SIZE	A4	SHEET		Shenzhen Liansheng Precision Connector Co., Ltd.	
X.XXX	±0.10	APPROVE		SHEET	1/1	PROJ.		PART NO.	
Angle	±3°	CHANGE		DIM	TOL	TITLE:		2.54FH H3.5mm 2xNpin W5.0mm 侧插脚	
REV	DATE	MODIFICATION DESCRIPTION		DIM		TOL		2.54FH H3.5mm 2xNpin W5.0mm 侧插脚	
A0	2012.03.28	NEW DRAWING		APPROVE		TITLE:		2.54FH H3.5mm 2xNpin W5.0mm 侧插脚	
1	1	2	3	4	5	6	7	8	9



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.