





ROHS

SPECIFICATIONS

Rated Current:7.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: LCP  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

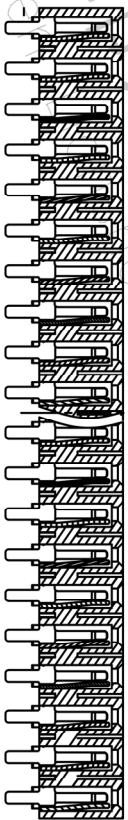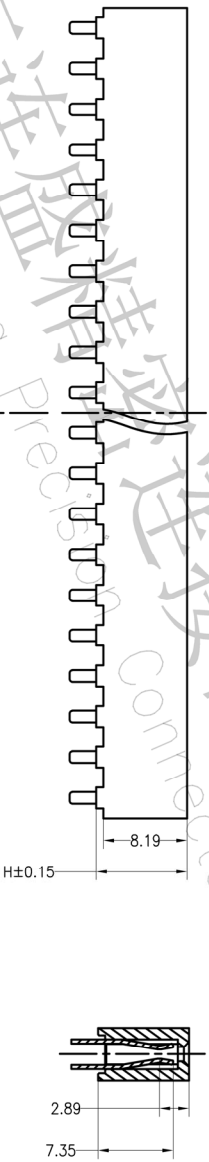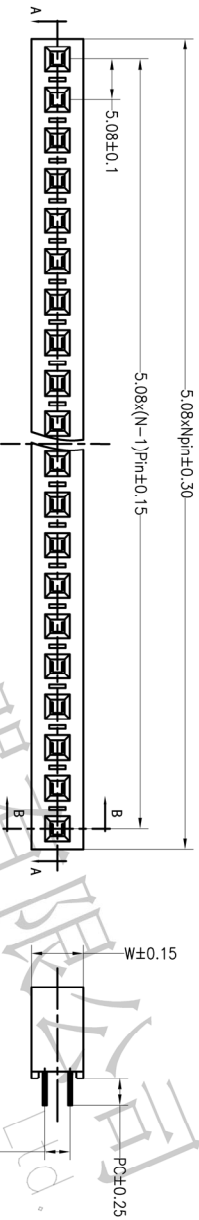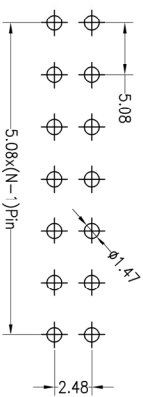

Ordering Information

F	X	T	X	XX	X	X	XX	X	XXXX
产品类型	间距	额定高度	排数	单排 PIN数	产品形态	塑胶材料	电镀厚度	包装方式	序列号
F=1排	F=1.27	N=8.9	1=11# 2=20# 3=25# 4=30# 5=1.0 6=2.0 7=2.54	1=40P	1=QFP 2=LCP 3=PS 4=ST 5=PLST 6=插接SMT 7=插接DIP	1=PBT 2=LCP 3=PS 4=ST 5=PLST 9=PLST	0.05mm 0.075mm 0.05mm 0.05mm 0.05mm 0.05mm	1=管状 2=盒装 3=散装 4=袋装 5=散装	

SEST1.PN:A-A

ITEM	PB	PC	PW	H	W
001		2.6		8.89	5.08
002					

**深圳市连盛精密连接器有限公司**  
 Shenzhen Liansheng Precision Connector Co., Ltd.

A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	SCALE	FIT	PART NO.	TITLE:
	A0	2012.09.21	NEW DRAWING				CHECK	UNIT	mm		
B	OPERATION	DRAW	CHECK	APPROVE	SCALE	FIT	SIZE	SHEET	1/1	PROJ.	
C	X.X	±0.30	X.XX	±0.20	X.XXX	±0.10	Angle	±3°			
D	1	2	3	4	5	6	7	8	9		