

ROHS

Materials

Pin (outer sleeve) :Brass,
 Clip/contact 4 /finger) :Beryllium copper,heat treated
 Plating(outer sleeve) :
 Gold plated: 1.25u"m/50u"nickel,full gold
 Plating clip(contact):
 1.25um/50 u"nickel,gold or tin plating
 Insulator body(black) : Glass filled thermoplastic polyester UL94V-0 electrical
 Current rating : 3 Amps/contact max.
 Contact resistance : 10mΩ /contact
 Insulation resistance : 1000M at V=100V
 Operating voltage : 60 AC/DC


Ordering Information

F 200 1XX S X X X G0 001

Type Pitch No. of Pins Connector Type Insulator Material Option Packing Contact Plating
 F=Female Header 200=2.00 1-40P S=Straight R=Right Angle M=SMT Z=插座 W=蜂胶脚
 A=BK-PBT B=BOX A=PE Bag G1:1U" Gold
 C=BK-PA9T C=Tube B=B0X G2:1.5U" Gold
 D=BK-LCP D=Tube+Cap G3:2U" Gold
 S=Special E=Reel+Cap G4:3U" Gold
 F=Reel+Mylar G5:5U" Gold
 SN:Tin S0:Gold Flash/Tin

Dimension antitheses list

ITEM	PB	PC	PW	H	W
001		4.6		2.8	2.2
002					

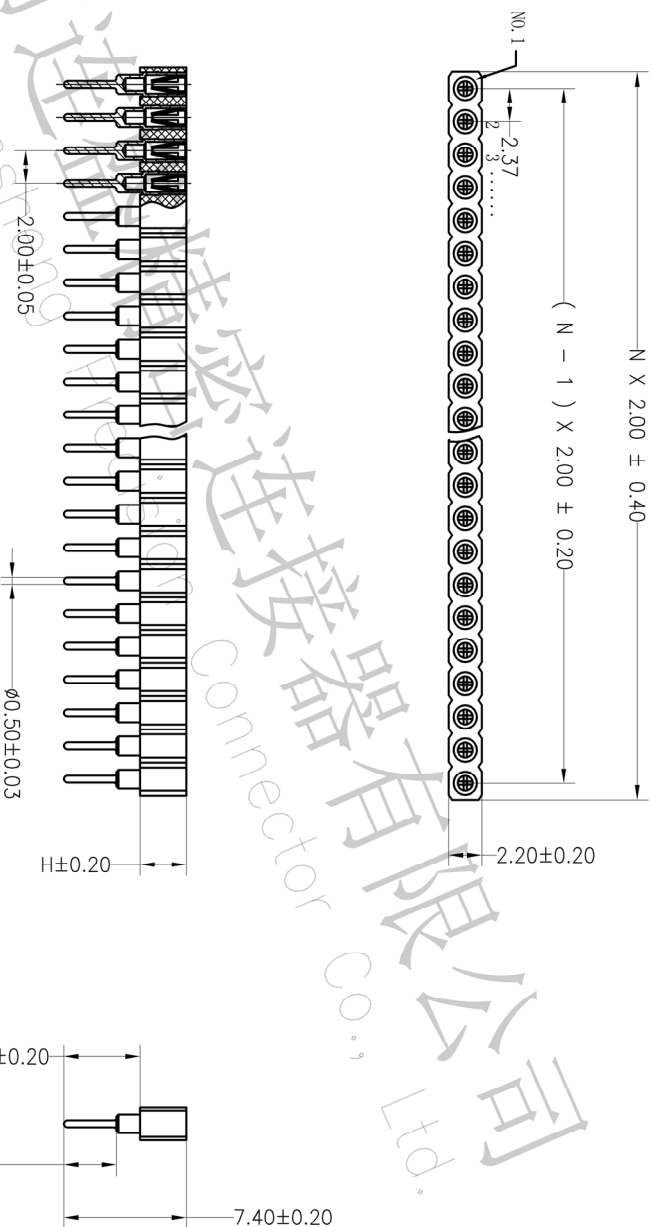

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	X.X	±0.20	UNIT	mm	SIZE	A4	SHEET	1.5/1
A0	2014.04.01	NEW DRAWING		CHECK					
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		PROJ.		TITLE:	2.0x2.8Machine 1*NP Socket L=7.4