


RoHS

额定电流: 5A  
 额定电压: 125V  
 耐压电压: AC 1500V/Minute  
 接触电阻:  $\leq 10m\Omega$   
 绝缘电阻:  $\geq 2000M\Omega$   
 工作温度:  $-55^{\circ}C$  to  $+120^{\circ}C$

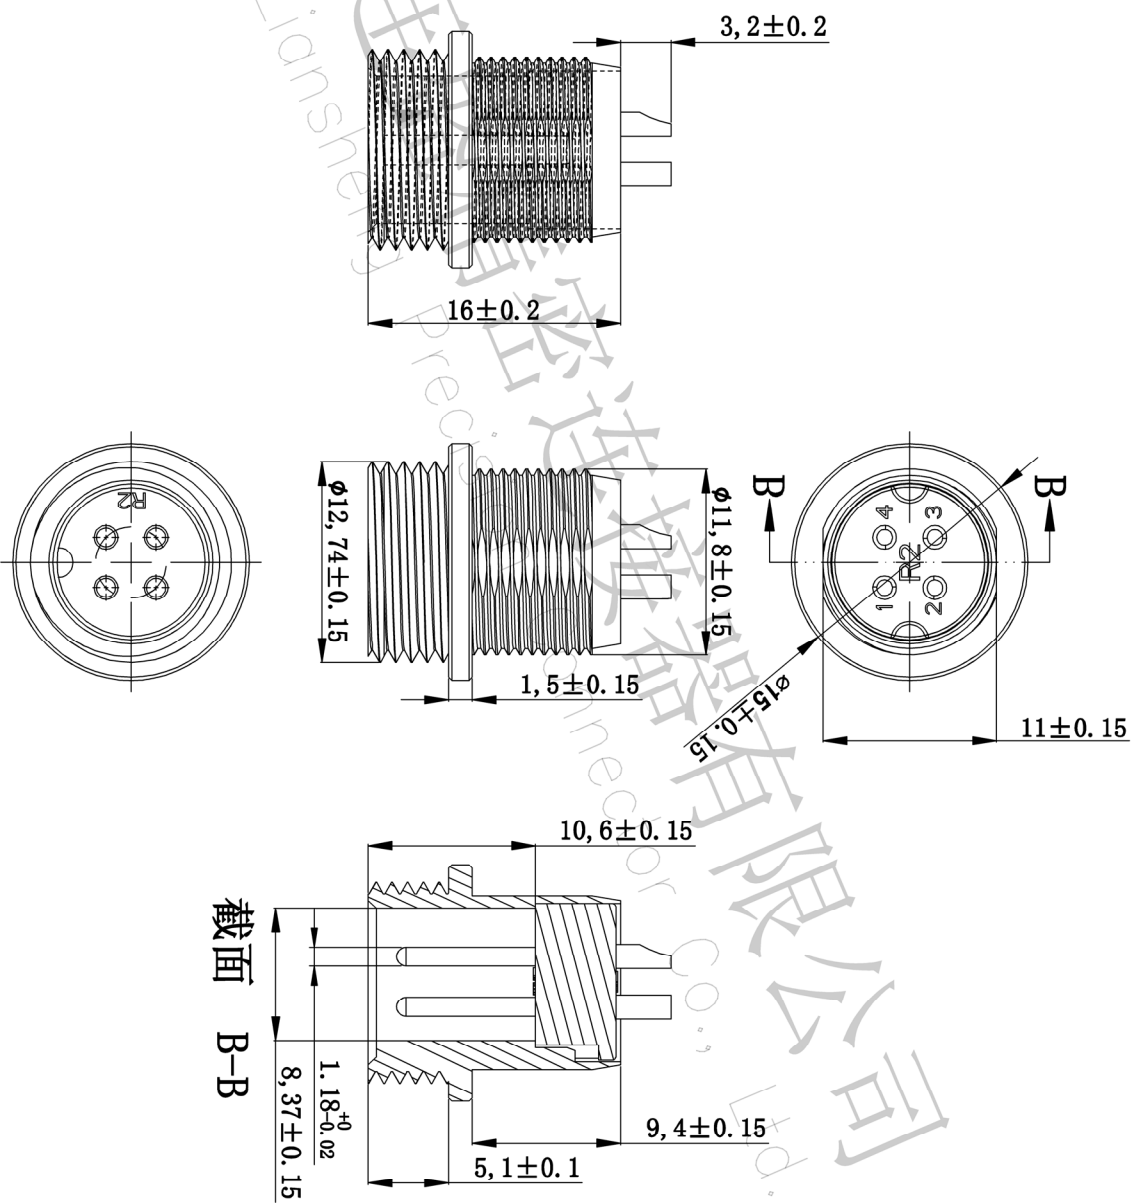

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	$\pm 0.30$	黄喜俊		UNIT	mm	A4		深圳市连盛精密连接器有限公司	
X.XX	$\pm 0.20$	卢能		SIZE	A4	1/1		Shenzhen Liansheng Precision Connector Co., Ltd.	
X.XXX	$\pm 0.10$	李双		SHEET	1/1	1/1		航空头板端12M-4P公座	
Angle	$\pm 3^{\circ}$	双		PROD.		TITLE:			
DIM	TOL	APPROVE		1/1		TITLE:			
CHANGE		李双		1/1		TITLE:			
4		李双		1/1		TITLE:			
3		李双		1/1		TITLE:			
2	MODIFICATION DESCRIPTION	李双		1/1		TITLE:			
1	DATE	李双		1/1		TITLE:			
1	2012.03.28	李双		1/1		TITLE:			
A0	NEW DRAWING	李双		1/1		TITLE:			
REV		李双		1/1		TITLE:			