

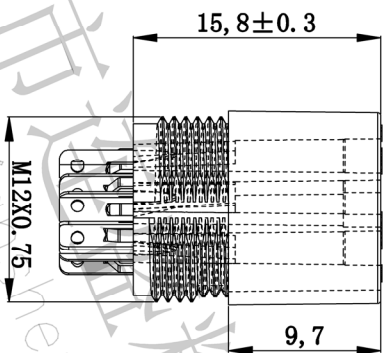



RoHS



规范: 额定电流: 3A
 耐电压: AC 1500V (AC) 1min
 绝缘电阻: 1500MΩ 1min
 接触电阻: 10 mΩ MAX
 工作温度: -40°C to +105°C
 材料:
 外壳: 锌合金镀镍
 圆针: 黄铜
 塑胶: 电木黑色
 盐雾: 24小时

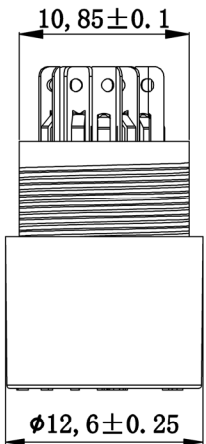

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

| | | | | | | | |
|-----------|-------|---------|--|-------|-----|-----------------|--------|
| OPERATION | | DRAW | | SCALE | FIT | PART NO. | TITLE: |
| X.X | ±0.30 | CHECK | | UNIT | mm | | |
| X.XX | ±0.20 | | | SIZE | A4 | 航空头R2-16M-8P 母座 | |
| X.XXX | ±0.10 | APPROVE | | SHEET | 1/1 | | |
| Angle | ±3° | | | PROJ. | | | |
| DIM | TOL | | | | | | |

| | | | |
|-----|------------|--------------------------|--------|
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
| A0 | 2012.03.28 | NEW DRAWING | |
| 1 | | | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|---|---|---|---|---|---|---|---|---|