

RoHS

SPECIFICATIONS


Rated Current: 2.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

Ordering Information

35112 XX A F S XX BNA1

No. of Pins: 16~64P
 Contact Type: F=Female
 Contact Plating:
 G0: Gold Flash
 S3: 10U" Gold
 S4: 15U" Gold
 S5: 30U" Gold
 S0: Gold Flash/Tin
 SN: Tin

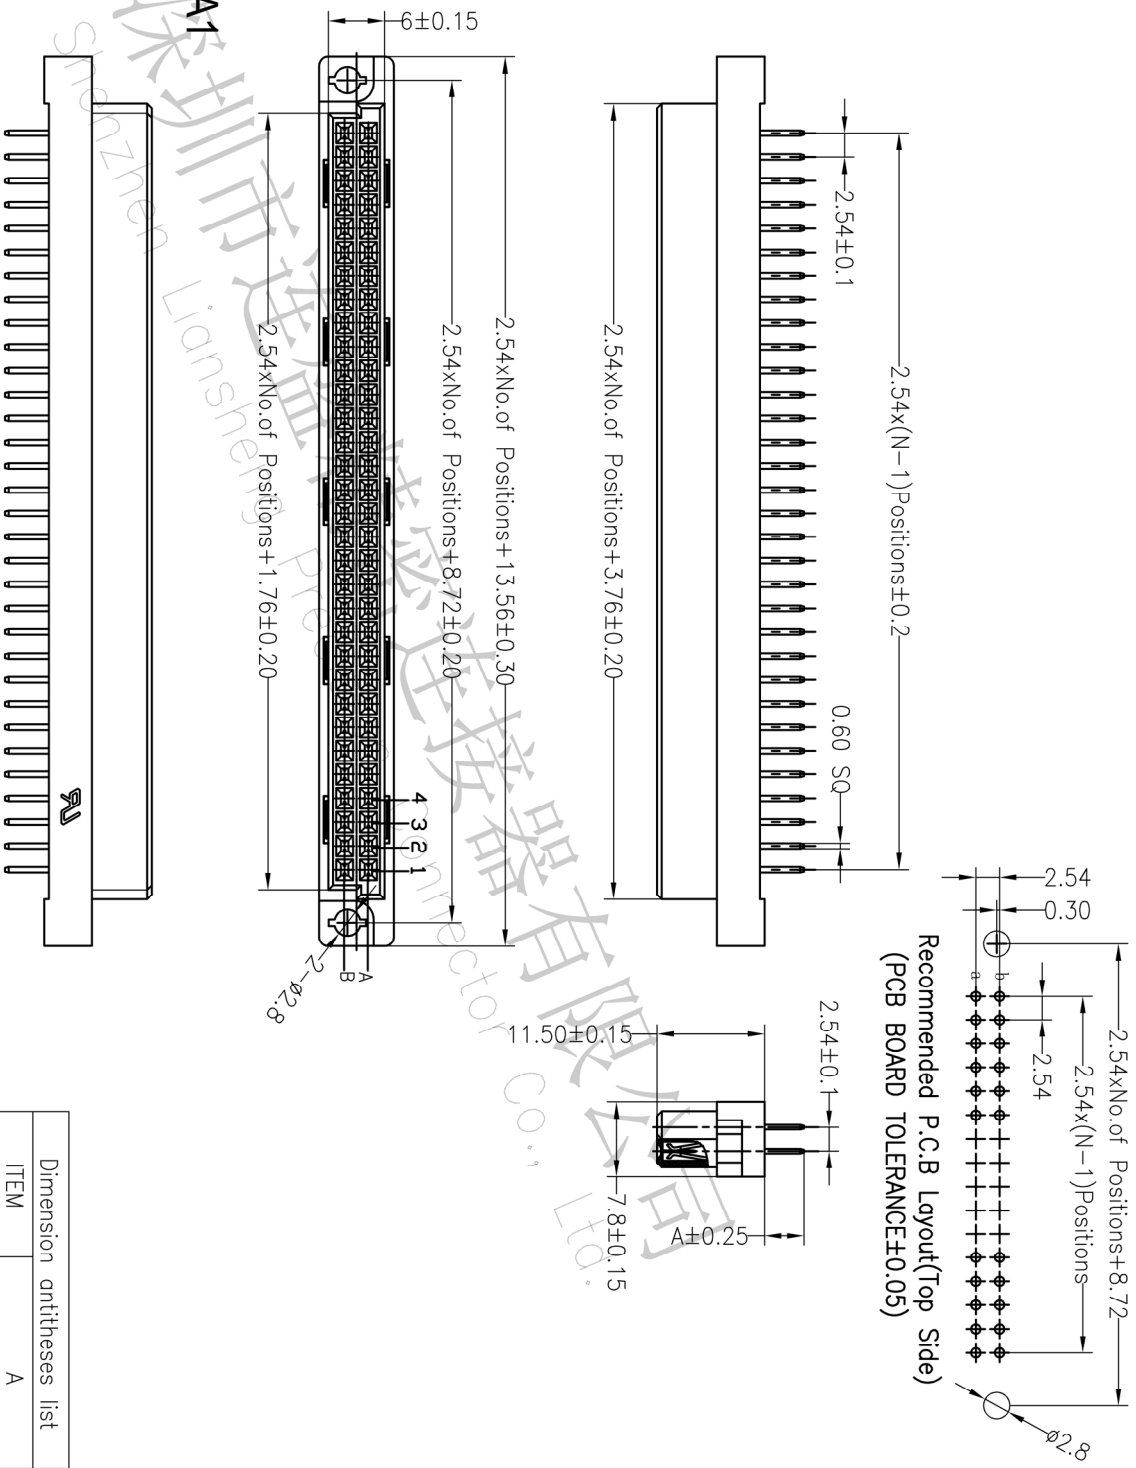

Dimension antitheses list	
ITEM	A
Standard	3.80
Alternate	



OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	黄	喜	UNIT	mm				
X.XX	±0.20	CHECK	卢	SIZE	A4				
X.XXX	±0.10		能	SHEET	1/1				
Angle	±3°	APPROVE	李	PROJ.	◆				
DIM	TOL		双						
CHANGE								TITLE:	
								欧式插座 母座 180度 2xNPN 成品系列图	

REV	DATE	MODIFICATION DESCRIPTION
A0	2012.04.10	NEW DRAWING
B	2014.09.16	增加U标识

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---