RoHS

SPECIFICATIONS
Rated Current:2.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 180°C for 30−60 seconds
(200°C for 10 seconds)

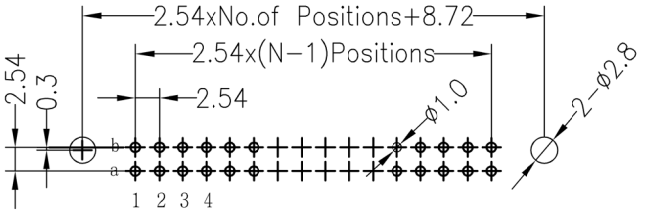

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

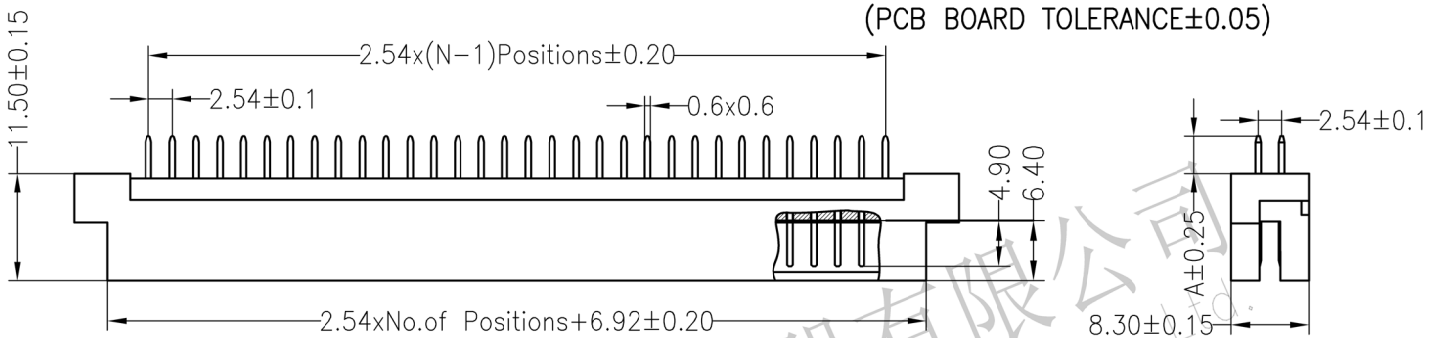

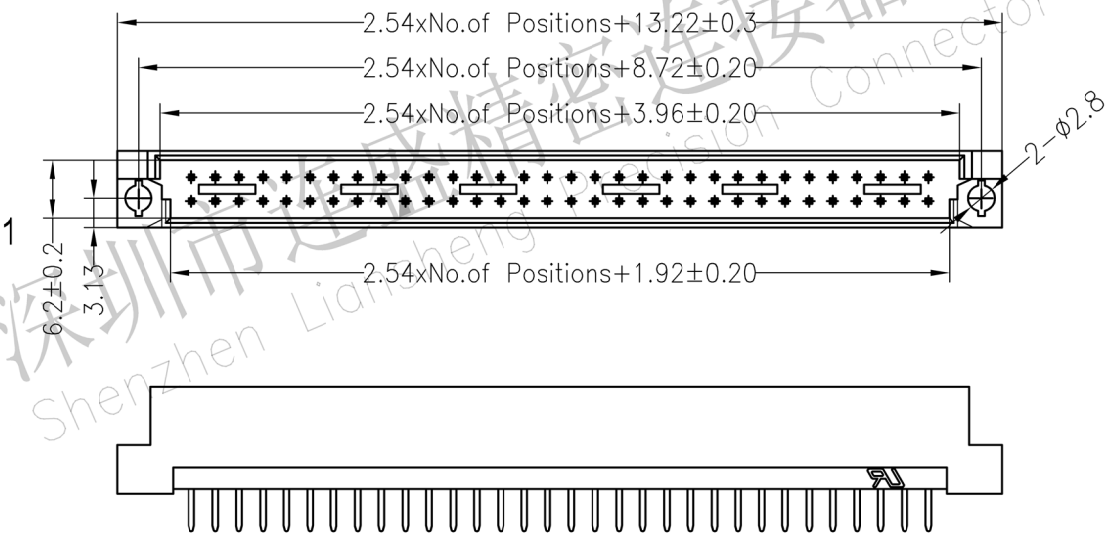

Ordering Information

3511 2 XX A M S XX B N X 01

- XX — No.of Pins: 20P,32P,48P 64P
- M — Contact Type: F=Female, M=Male
- XX — Contact Plating: G0:Gold Flash; S2:2U" Gold; S3:10U" Gold; S4:15U" Gold; S5:30U" Gold; S0:Gold Flash/Tin; SN:Tin
- X — Packing: A=Tray, T=Tube

Dimension antitheses list	
ITEM	A
Standard	4.00
Alternate	2.50

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
B	2014.09.16	增加UL标识	
A0	2012.04.10	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	黄喜俊
CHECK	卢 能
APPROVE	李 双

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

深圳市连盛精密连接器有限公司
Shenzhen Liansheng Precision Connector Co., Ltd.

PART NO.

TITLE: 欧式插座 公座 180度 2xNPIN 成品系列图

深圳市连盛精密连接器有限公司 Shenzhen Liansheng Precision Connector Co., Ltd.