
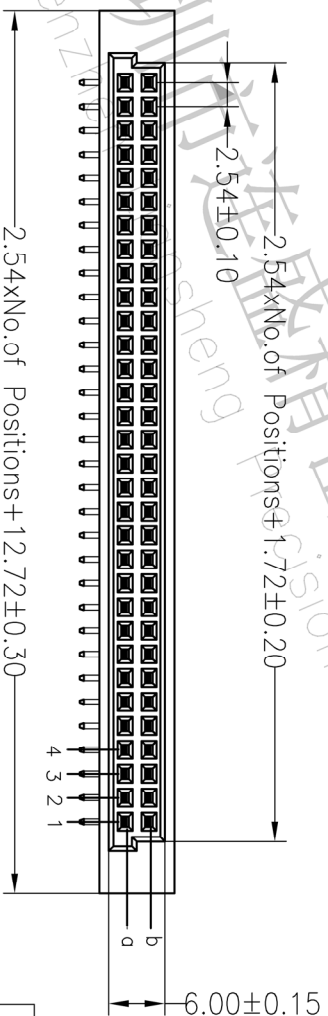
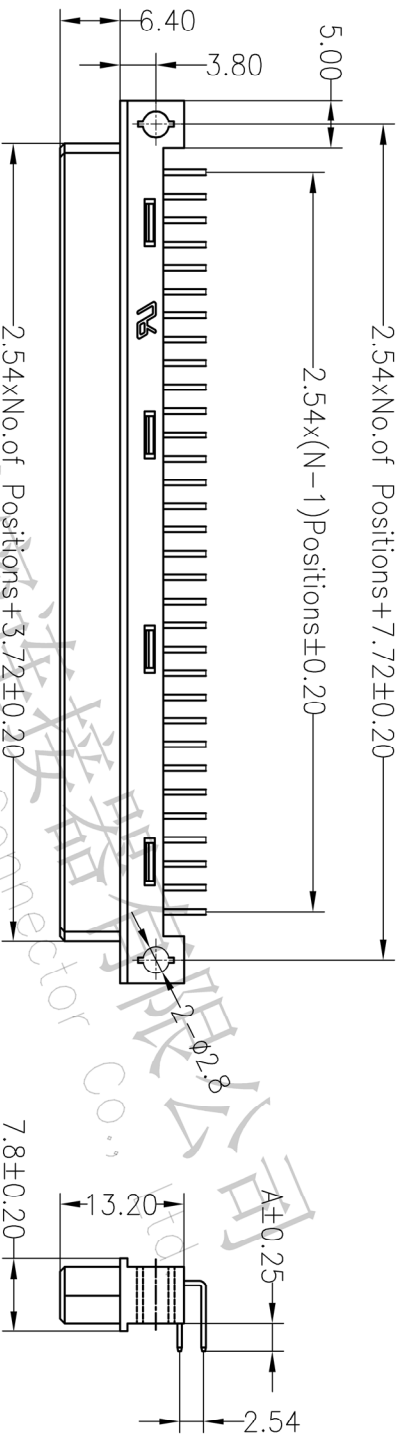


# RoHS

## SPECIFICATIONS

Rated Current: 2.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT  
 Max. Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

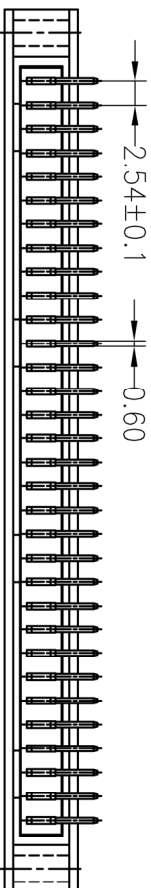

## Ordering Information

3511 2 XX A F R XX BN 01

No. of Pins: 16-64P  
 Contact Type: M=Male, F=Female  
 Contact Plating: G0:Gold Flash, S2:1.5U" Gold, S3:2U" Gold, S4:3U" Gold, S5:5U" Gold, S0:Gold Flash/Tin, SN:Tin

Dimension antitheses list	
ITEM	A
Standard	2.90
Alternate	

**深圳市连盛精密连接器有限公司**  
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	黄喜俊		UNIT	mm			SIZE	A4
X.XX	±0.20	卢能		SIZE		SHEET	1/1	SHEET	1/1
X.XXX	±0.10	李双		PROJ.		TITLE:		PART NO.	
Angle	±3°					欧式插座 母座 90度 2xNPIN 成品系列图			
DIM	TOL	APPROVE				TITLE:			
1	2	3	4	5	6	7	8	9	