

RoHS

SPECIFICATIONS




Rated Current: 2.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

Ordering Information

35113 XX A M S XX B N X 01

No. of Pins: 30±96P
 Contact Type: F=Female, M=Male
 Contact Plating: G0:Gold Flash, S2:2U" Gold, S3:10U" Gold, S4:15U" Gold, S5:30U" Gold, S0:Gold Flash/Tin
 Packing: A=Troy, T=Tube

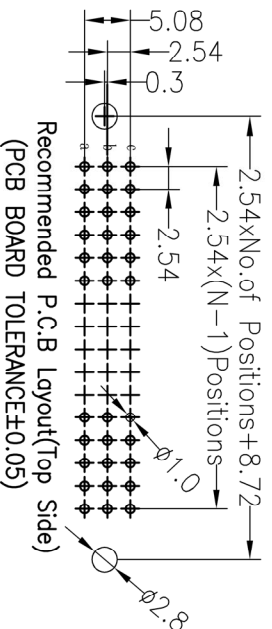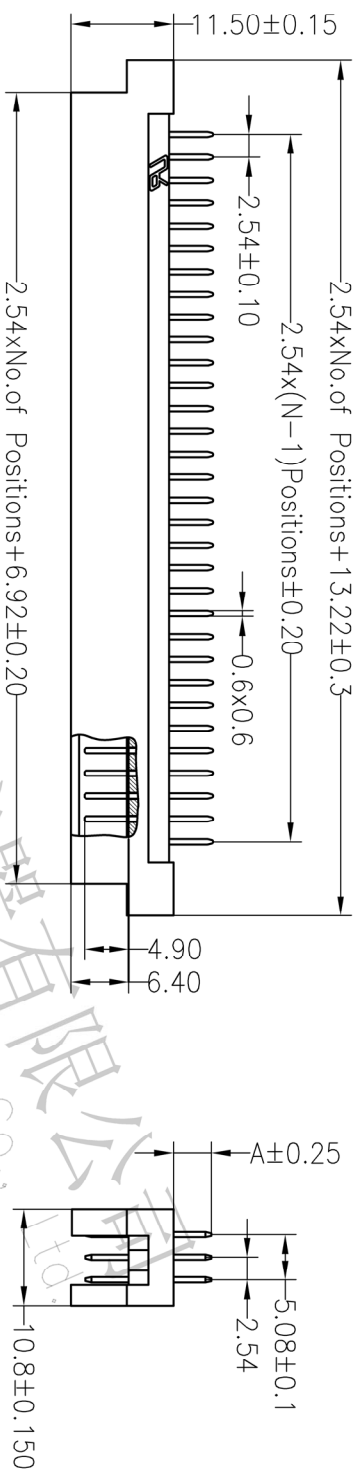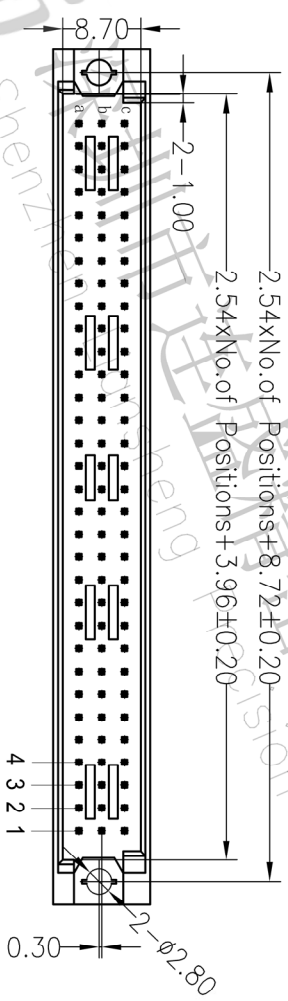

| Dimension antitheses list | |
|---------------------------|------|
| ITEM | A |
| Standard | 4.00 |
| Alternate | |

| OPERATION | | DRAW | | SCALE | | FIT | | PART NO. | |
|-----------|-------|---------|----|-------|-----|-----|--|--|--|
| X.X | ±0.30 | 黄 | 喜俊 | UNIT | mm | | | 深圳市连盛精密连接器有限公司 | |
| X.XX | ±0.20 | CHECK | 卢能 | SIZE | A4 | | | Shenzhen Liansheng Precision Connector Co., Ltd. | |
| X.XXX | ±0.10 | | | SHEET | 1/1 | | | 增加山标 | |
| Angle | ±3° | APPROVE | 李双 | PROJ. | ◆ | | | NEW DRAWING | |
| DIM | TOL | | | | | | | MODIFICATION DESCRIPTION | |
| CHANGE | | | | | | | | DATE | |
| | | | | | | | | 2012.04.10 | |
| | | | | | | | | REV | |
| | | | | | | | | A0 | |
| | | | | | | | | 2014.09.16 | |
| | | | | | | | | B | |
| | | | | | | | | 1 | |



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

欧式插座 公座 180度 3xNPIN 成品系列图