
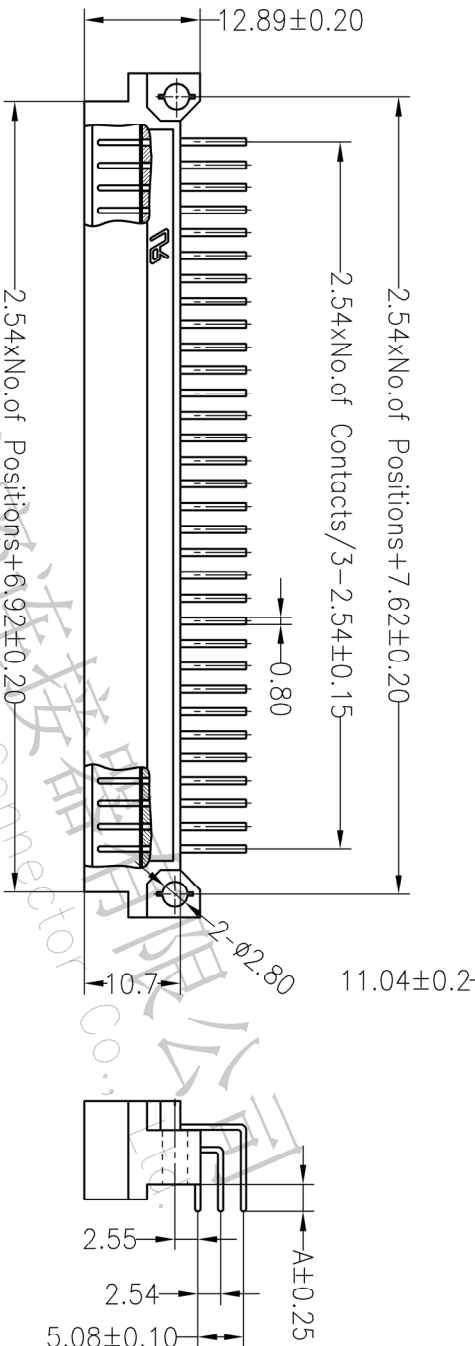


RoHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

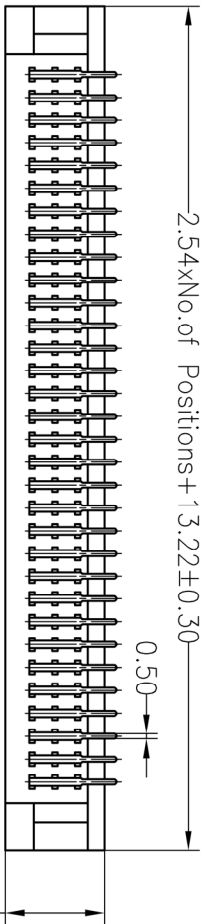

Ordering Information

3511 3 XX A M R XX B N A 01

No. of Pins: 30~96PIN
 Contact Type: M=mate
 Contact Plating: G0:Gold Flash, S2:2U" Gold, S3:10U" Gold, S4:15U" Gold, S5:30U" Gold, S0:Gold Flash/Tin, SN:Tin
 Packing: 0=PE Bag, A=Troy

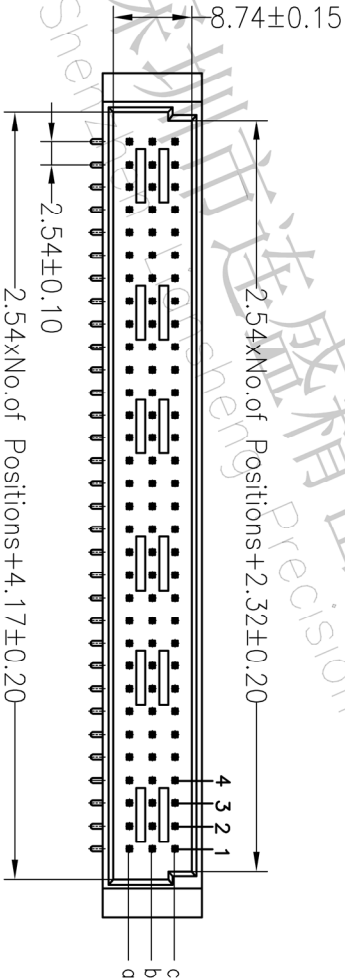

Dimension antitheses list	
ITEM	A
Standard	3.00
Alternate	

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.	TITLE:
A0	2012.04.10	NEW DRAWING		X.XX ±0.10	CHECK	A4	1/1		欧式插座 公座 90度 3XNPIN 成品系列图
B	2014.09.16	增加U上标识		X.XX ±0.20	CHECK	A4	1/1		
1				X.XX ±0.30					