
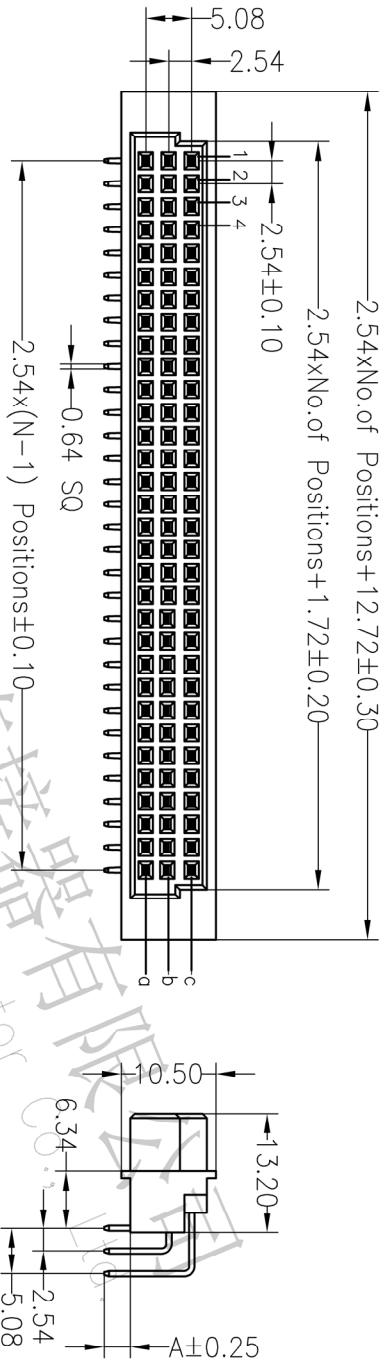


RoHS

SPECIFICATIONS

Rated Current: 2.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

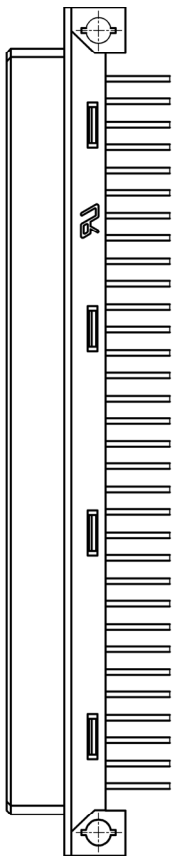

Ordering Information

35113 XX A F R XX B N X 01

No. of Pins: 30~96PIN
 Contact Type: F=Female
 Contact Plating: G0:Gold Flash, S2:2U" Gold, S3:10U" Gold, S4:15U" Gold, S5:30U" Gold, S0:Gold Flash/Tin
 Packing: A=Troy, T=Tube

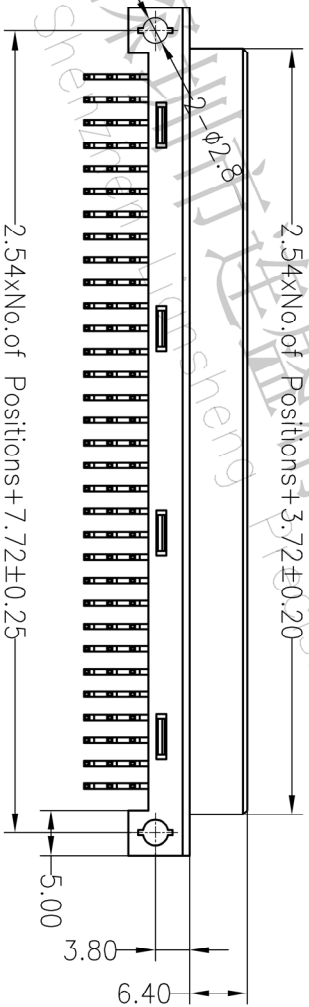

| Dimension antitheses list | |
|---------------------------|------|
| ITEM | A |
| Standard | 2.90 |
| Alternate | |

深圳市连盛精密连接器有限公司
 Shenzhen Lansheng Precision Connector Co., Ltd.

| OPERATION | | DRAW | | SCALE | | FIT | | PART NO. | | | |
|--|-------------|---------|--|-------|-----|-----|--|----------|--------------------------|--|--|
| X.X | ±0.30 | | | UNIT | mm | | | | | | |
| X.XX | ±0.20 | CHECK | | SIZE | A4 | | | | | | |
| X.XXX | ±0.10 | | | SHEET | 1/1 | | | | | | |
| Angle | ±3° | APPROVE | | PROJ. | | | | TITLE: | 欧式插座 母座 90度 3xNPIN 成品系列图 | | |
| DIM | TOL | | | | | | | | | | |
| CHANGE | | | | | | | | | | | |
| MODIFICATION DESCRIPTION | | | | | | | | | | | |
| DATE | NEW DRAWING | | | | | | | | | | |
| REV | 增加U标 | | | | | | | | | | |
| A0 | 2012.04.10 | | | | | | | | | | |
| B | 2014.09.16 | | | | | | | | | | |
| <p>深圳市连盛精密连接器有限公司 Shenzhen Lansheng Precision Connector Co., Ltd.</p> | | | | | | | | | | | |