

1 2 3 4 5 6 7 8 9


RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

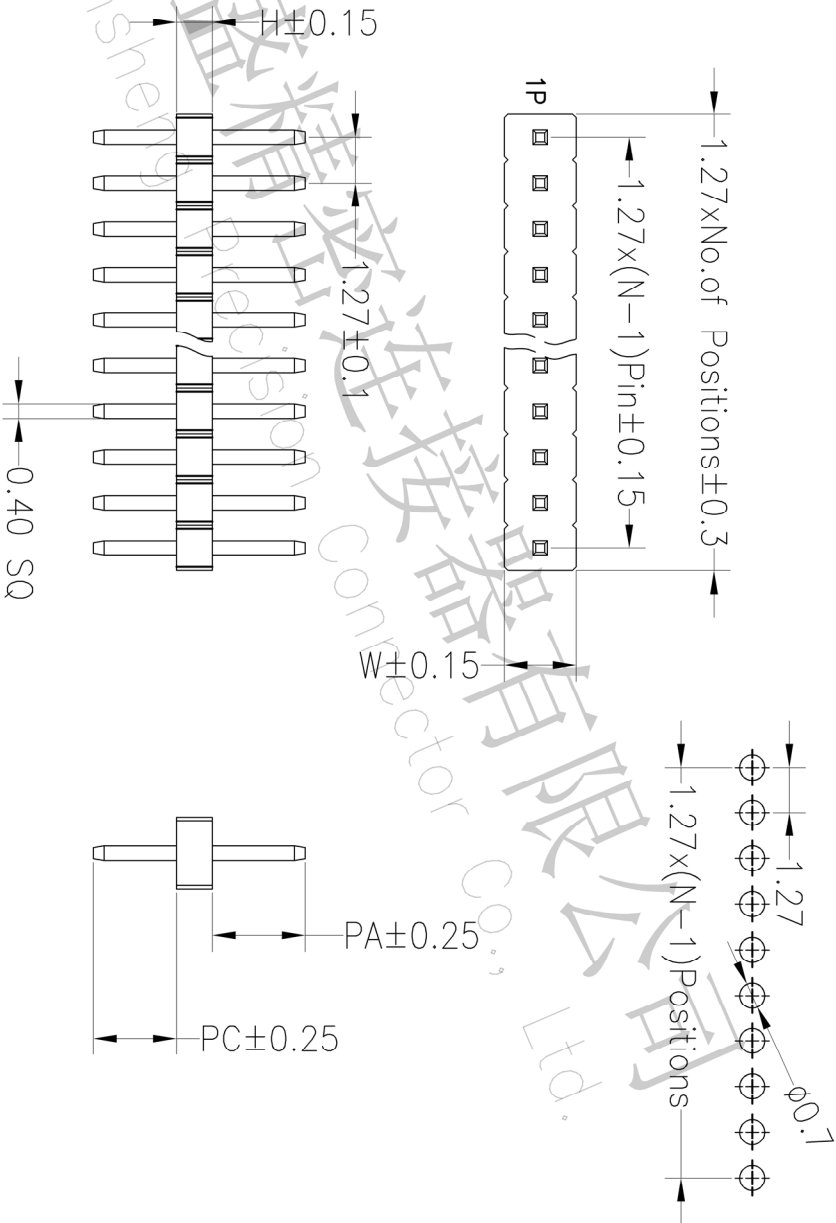

Ordering Information

P 1 X 1 1 XX 1 5 XX X XXXX

产品型号
P=排针

间距
1=1.27

塑胶高度
A=1.0
B=1.5
C=2.0
D=2.5

排数
1=单排

单排PIN数
1-40P

产品形态
1=DIP

塑胶材料
5=PA6T

电镀厚度
00=常规
01=1u"
02=2u"
03=3u"

包装方式
1=管装
2=卷装
3=盘装
4=袋装
5=盒装

序列号

Dimension antitheses list

ITEM	PC	PA	H	W
001	1.80	2.00	1.0/1.5/2.0/2.5	2.0/2.4/2.4/2.5
Alternate				

深圳市连盛精密连接器有限公司
Shenzhen Liansheng Precision Connector Co., Ltd.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW		SCALE		PART NO.	TITLE:
				DIM	TOL	CHECK	APPROVE	UNIT	FIT		
A0	2012.03.28	NEW DRAWING		X.XX	±0.30			mm	A4	1/1	1.27PH 1xNpin DIP
1				X.XXX	±0.10	CHECK	APPROVE				
1				Angle	±3°						
1				DIM	TOL						