





RoHS

SPECIFICATIONS

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

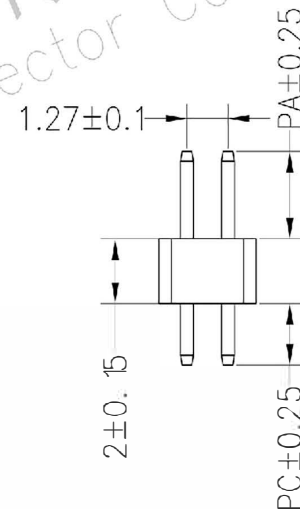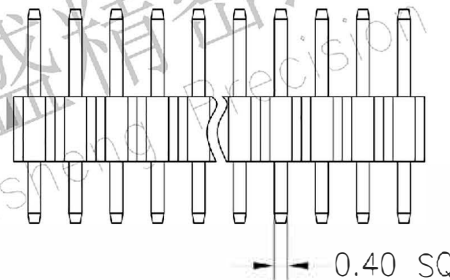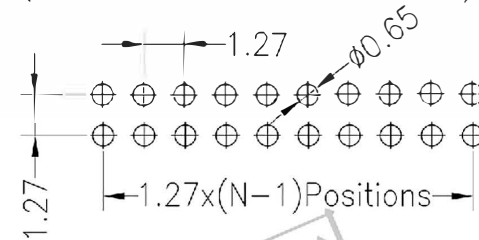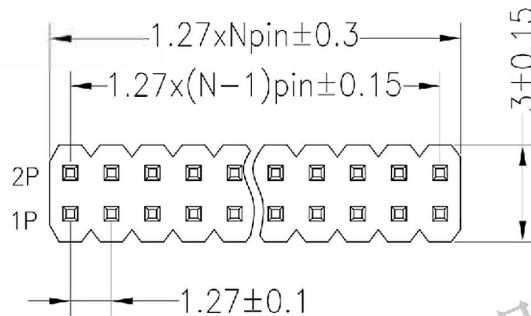

Ordering Information

P	1	X	2	XX	1	5	XX	X	XXXX
产品类型 P=插针	间距 1=1.27	塑胶高度 A=1.0 B=1.5 C=2.0 D=2.5	排数 1=单排 2=双排	单排PIN数 1~40P	产品形态 1=DIP	塑胶材料 5=PA6T	电镀厚度 00=笔镀 01=1u" 02=2u" 03=3u"	包装方式 1=管装 2=卷装 3=盘装 4=袋装 5=盒装	序列号

Dimension antitheses list			
ITEM	PA	PC	L
Alternate	3.70	2.10	7.80

				OPERATION		DRAW		SCALE		FIT	
				X.X	±0.30			UNIT	mm		深圳市连盛精密连接器有限公司 Shenzhen Liansheng Precision Connector Co., Ltd.
				X.XX	±0.20	CHECK		SIZE	A4		
				X.XXX	±0.10	APPROVE		SHEET	1/1		
				Angle	±3°			PROJ.			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			PART NO.		TITLE:
1	2012.03.28	NEW DRAWING									1.27PH H2.0mm 2xNpin DIP