


RoHS

SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

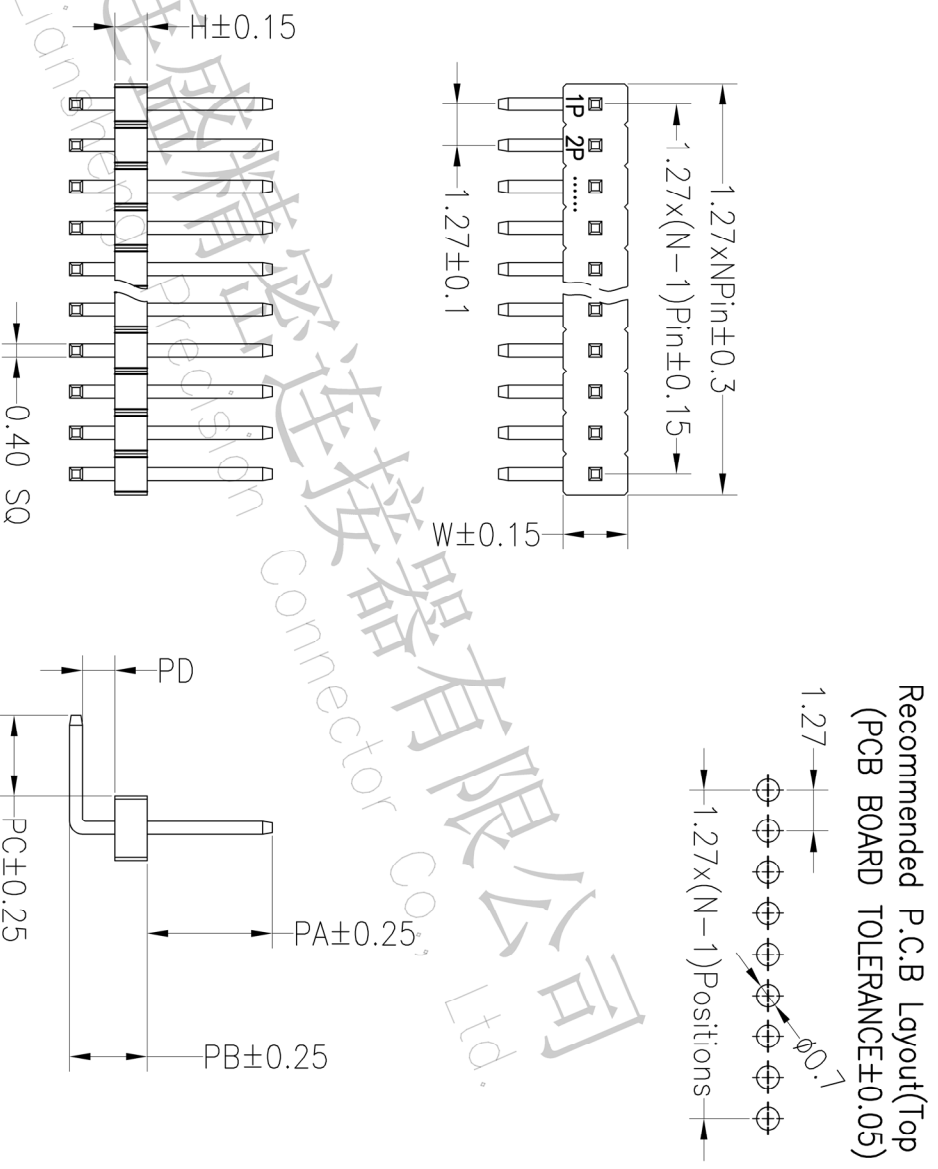


Ordering Information

P 1 X 1 XX 2 5 XX X XXXX

产品类别: P=排针
 间距: 1=1.27
 塑胶高度: A=1.0, B=1.5, C=2.0, D=2.5
 排数: 1=单排, 2=双排
 单排PIN数: 1~40P
 产品形态: 1=DIP, 2=RA, 3=SWT, 4=SH, 5=嵌装脚
 塑胶材料: 5=PA6T
 电镀厚度: 00=常规, 01=10", 02=20", 03=30"
 包装方式: 1=管装, 2=卷装, 3=盘装, 4=袋装, 5=盒装
 序列号

Dimension antitheses list						
ITEM	PA	PB	PC	PD	H	W
001	3.00	2.00	1.00	1.0/1.5/2.0/2.5	2.0/2.4/2.4/2.5	
Alternate						



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE	FIT	PART NO.	
X.X	±0.30			UNIT	mm		
X.XX	±0.20	CHECK		SIZE	A4		
X.XXX	±0.10			SHEET	1/1	TITLE:	1.27PH 1XNpin 90°
Angle	±3°	APPROVE		PROJ.			
DIM	TOL						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---