


ROHS




SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

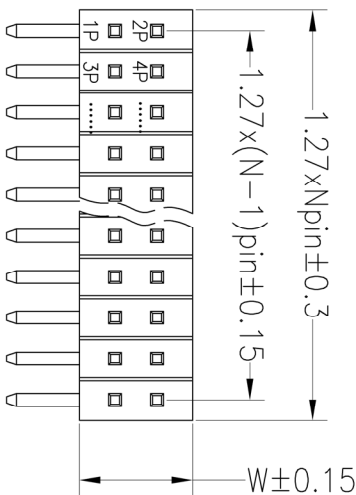

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

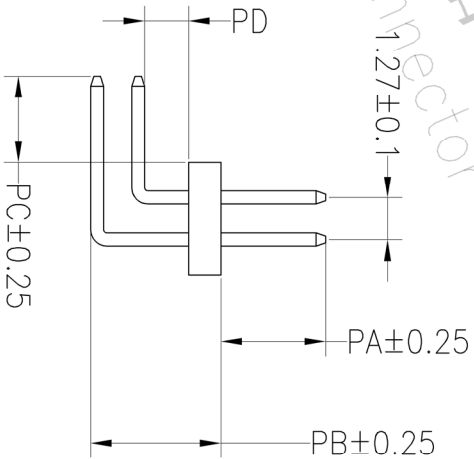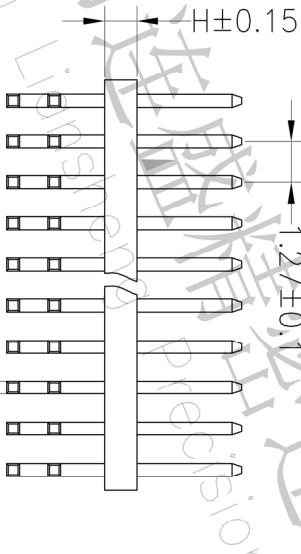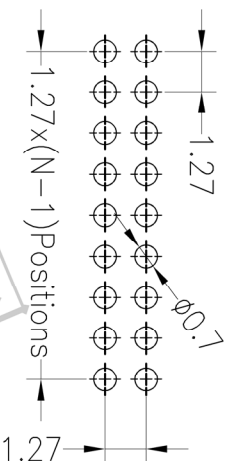

Ordering Information

P 1 X 2 XX 2 5 XXX X XXXX

产品类别: 1=插针
 间距: 1=1.27
 塑胶高度: A=1.0, B=1.5, C=2.0, D=2.5
 排数: 1=单排, 2=双排
 单排Pin数: 1~40P
 产品形态: 1=DIP, 2=RA, 3=SMT, 4=SH, 5=裸线脚
 塑胶材料: 5=PA6T
 电镀厚度: 00=常规, 01=1u", 02=2u", 03=3u"
 包装方式: 1=管装, 2=卷装, 3=盘装, 4=盒装, 5=盘装

ITEM	PA	PB	PC	PD	H	W
001	3.00	2.00	1.00	1.0/1.5/2.0/2.5	3.4/3.4/3.0/3.0	



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE	FIT	PART NO.	
X.X	±0.30			UNIT	mm		
X.XX	±0.20	CHECK		SIZE	A4		
X.XXX	±0.10			SHEET	1/1	TITLE:	1.27PH 2xNpin 90°
Angle	±3°	APPROVE		PROJ.			
DIM	TOL						