


RoHS

SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c


Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

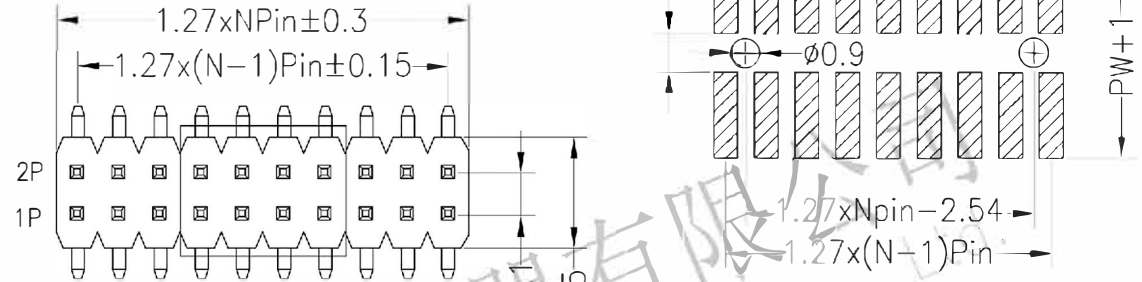

Ordering Information

P	1	X	2	XX	3	5	XX	X	XXXX
产品类型 P=插针	间距 1=1.27	绝缘高度 A=1.0 B=1.5 C=2.0 D=2.5	排数 1=单排 2=双排	单排PIN数 1-40P	产品形态 1=DIP 2=KA 3=SMT 4=SH 5=焊线脚	绝缘材料 5=PA6T	电镀厚度 00=常规 01=1u" 02=2u" 03=3u"	包装方式 1=管装 2=卷装 3=盒装 4=袋装 5=盒装	序列号

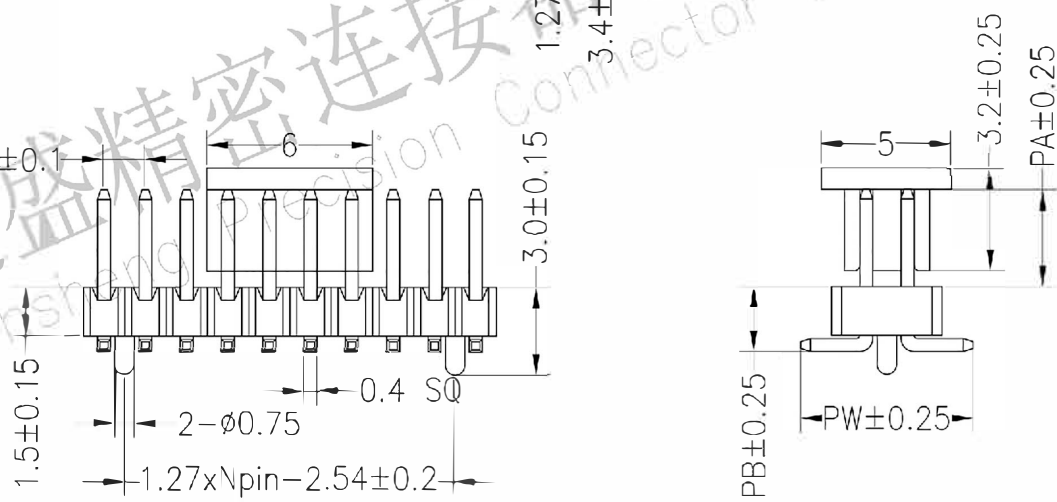

Dimension antitheses list				
ITEM	PA	PB	PW	L
Standard	6.00	2.00	5.50	9.80

				OPERATION		DRAW		SCALE		FIT		深圳市连盛精密连接器有限公司 Shenzhen Liansheng Precision Connector Co., Ltd.		
				X.X	±0.30			UNIT	mm					
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.				
A0				2012.04.19	NEW DRAWING				SHEET	1/1	TITLE:			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE				PROJ.		1.27PH 2xNPin H1.5 SMT带内柱夹持盖				
1	2	3	4	5	6	7	8	9						