


RoHS

SPECIFICATIONS




Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)

Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

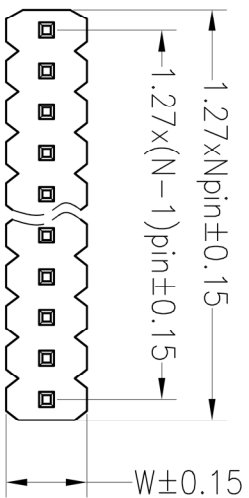

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

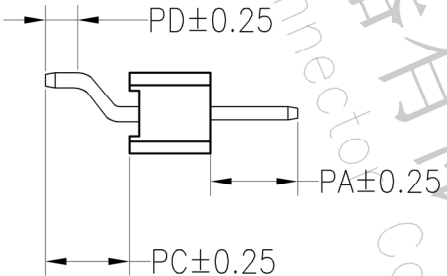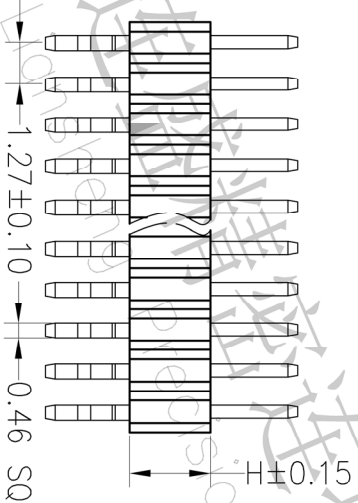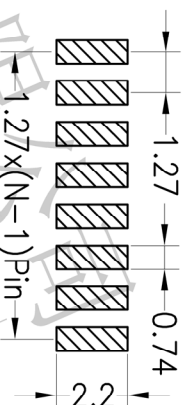

Ordering Information

P 1 X 1 XX 4 5 XX X XXXX

产品类型 间距 塑胶高度 排数 单排PIN数 产品形态 塑胶材料 电镀厚度 包装方式
 P=排针 1=1.27 A=1.0 B=1.5 C=2.0 D=2.5 1=单排 2=双排 1=0P 1=DIP 2=SM 3=SMT 4=SH 5=载板脚 0=常规 01=1u" 02=2u" 03=3u" 1=管装 2=卷装 3=盘装 4=袋装 5=盒装

Dimension antitheses list									
ITEM	PA	PC	L	PD	H	W			
001	4.00	2.60	9.30	1.00	2.5	2.5			
Alternate									

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4				
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								
CHANGE		CHANGE		CHANGE		CHANGE		CHANGE	
MODIFICATION DESCRIPTION		MODIFICATION DESCRIPTION		MODIFICATION DESCRIPTION		MODIFICATION DESCRIPTION		MODIFICATION DESCRIPTION	
DATE	2012.03.28	NEW DRAWING							
REV	A0								
1.27PH 1XNP 贴片									