


RoHS




SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

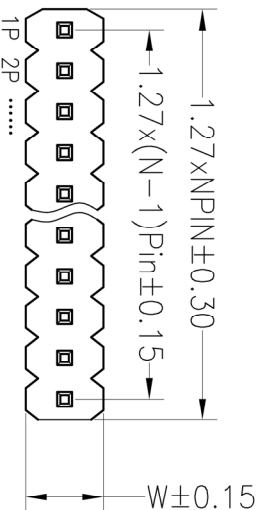

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

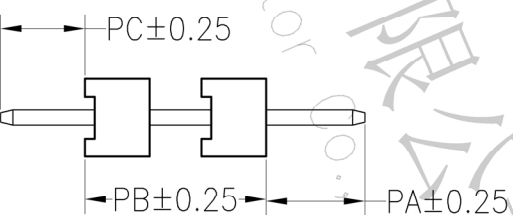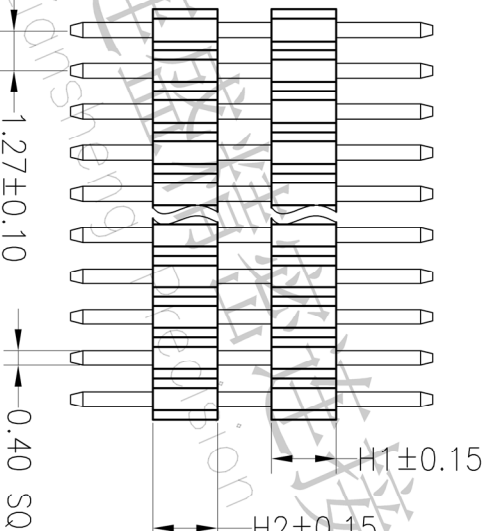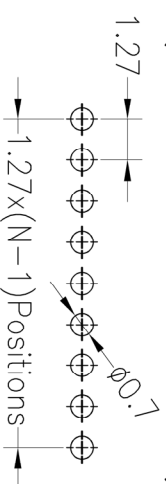

Ordering Information

P X X X XX X X XX X XXX

产品选型
 P=排针
 间距 1=1.27 A=1.0
 2=2.0 B=1.5
 3=2.54 C=2.0
 4=3.96 D=2.5
 排数 1=单排 2=双排
 单排PIN数 1~40P
 产品形态 1=DIP 2=BA
 3=SMT 4=SH
 5=板级脚
 塑胶材料 1=PBT 2=LCP
 3=PPS 4=PA46
 5=PA6T 9=PA9T
 电键厚度 00=常规
 01=1.1" 02=2.1"
 03=3.1"
 包装方式 1=管装
 2=卷装 3=盘装
 4=袋装 5=盒装

序列号

Dimension antitheses list				
ITEM	PA	PB	PC	L
001	4.00	5.50	3.00	12.50
Alternate				1.0/1.5/2.0/2.5
				2.0/2.4/2.5

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4				
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.				TITLE:	1.27PH 1XNP 双塑 180度
DIM	TOL								

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2014.03.14	NEW DRAWING	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
1			