

ROHS

SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)

Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)





Ordering Information

P X X X XX X X XX X XXX

产品类别 间距 塑胶高度 排数 单排PIN数 产品形态 塑胶材料 电镀厚度 包装方式 序列号
 P=排针 1=1.27 2=2.0 3=2.54 4=3.96 5=1.0 A=1.0 B=1.5 C=2.0 D=2.5 A=1.27*2.54 1=单排 2=双排 1~40P 1=DIP 2=RA 3=SMT 4=SH 5=嵌胶脚 1=PBT 2=LCP 3=PPS 4=PA46 9=PA9T 00=常规 01=1u" 02=2u" 03=3u" 1=管装 2=卷装 3=盘装 4=袋装 5=盒装

Dimension antitheses list				
ITEM	PA	PC	L	W
001	4.00	3.00	9.50	2.5
Alternate				5.0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

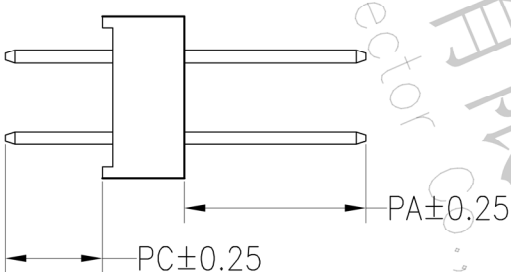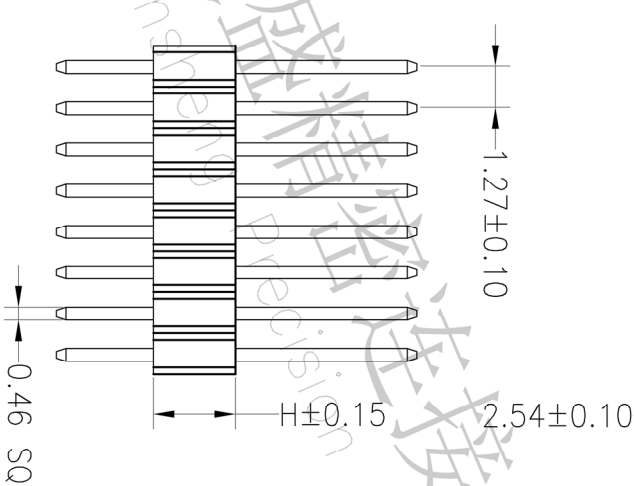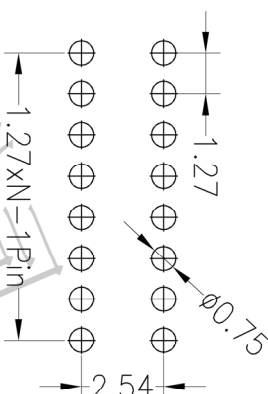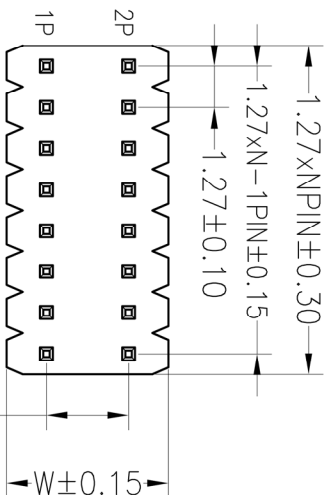

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	X.X	±0.20	UNIT	mm	SIZE	A4	SHEET	1/1
X.XXX <td>±0.10 <td>CHECK <td> <td>PROJ. <td> <td>TITLE: <td colspan="3">1.27x2.5PH 2XNP 180度</td> </td></td></td></td></td></td>	±0.10 <td>CHECK <td> <td>PROJ. <td> <td>TITLE: <td colspan="3">1.27x2.5PH 2XNP 180度</td> </td></td></td></td></td>	CHECK <td> <td>PROJ. <td> <td>TITLE: <td colspan="3">1.27x2.5PH 2XNP 180度</td> </td></td></td></td>	<td>PROJ. <td> <td>TITLE: <td colspan="3">1.27x2.5PH 2XNP 180度</td> </td></td></td>	PROJ. <td> <td>TITLE: <td colspan="3">1.27x2.5PH 2XNP 180度</td> </td></td>	<td>TITLE: <td colspan="3">1.27x2.5PH 2XNP 180度</td> </td>	TITLE: <td colspan="3">1.27x2.5PH 2XNP 180度</td>	1.27x2.5PH 2XNP 180度		
REV <td>DATE <td>MODIFICATION DESCRIPTION <td>CHANGE <td>DIM <td>TOL <td>APPROVE <td colspan="3"></td> </td></td></td></td></td></td>	DATE <td>MODIFICATION DESCRIPTION <td>CHANGE <td>DIM <td>TOL <td>APPROVE <td colspan="3"></td> </td></td></td></td></td>	MODIFICATION DESCRIPTION <td>CHANGE <td>DIM <td>TOL <td>APPROVE <td colspan="3"></td> </td></td></td></td>	CHANGE <td>DIM <td>TOL <td>APPROVE <td colspan="3"></td> </td></td></td>	DIM <td>TOL <td>APPROVE <td colspan="3"></td> </td></td>	TOL <td>APPROVE <td colspan="3"></td> </td>	APPROVE <td colspan="3"></td>			
1									

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.