


ROHS

SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

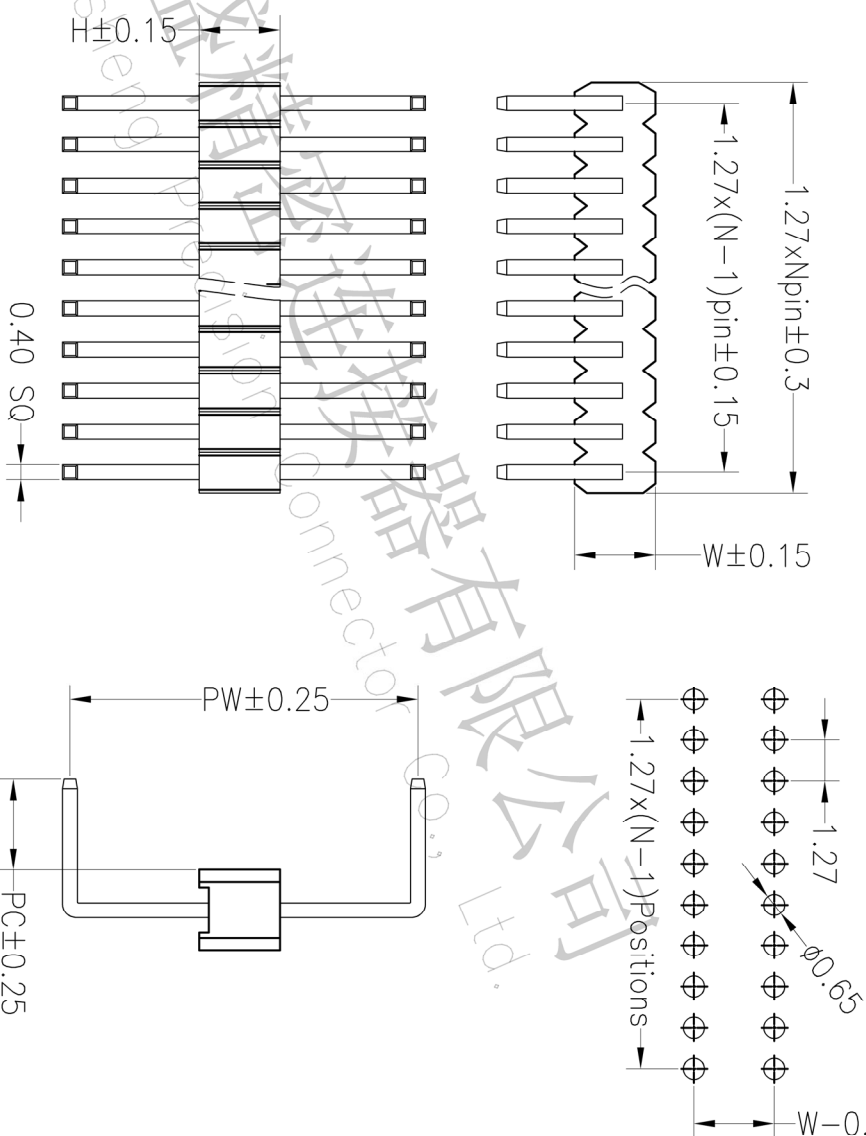

Ordering Information

P	X	X	X	XX	X	XX	X	XXXX
---	---	---	---	----	---	----	---	------

产品类别
 P=排针

间距
 1=1.27
 2=2.0
 3=2.54
 4=3.96
 5=1.0

塑胶高度
 A=1.0
 B=1.5
 C=2.0
 D=2.5

排数
 1=单排
 2=双排

单排PIN数
 1~40P

产品形态
 1=DIP
 2=RA
 3=SMT
 4=SH
 5=螺钉脚

塑胶材料
 1=PB
 2=LCP
 3=PPS
 4=PA46
 5=PA6T
 9=PA9T

电镀厚度
 00=常规
 01=1u"
 02=2u"
 03=3u"

包装方式
 1=管装
 2=卷装
 3=盘装
 4=袋装
 5=盒装

序列号

ITEM	PA	PB	PW	PC	L	H1/H2	W
001			12.00	2.00	17.70	2.5	2.5
Alternate							

注:塑胶居中



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	OPERATION	DRAW	CHECK	APPROVE	SCALE	FIT	PART NO.	TITLE:
	A0	2012.03.28	NEW DRAWING				X.XX X.XXX Angle	±0.30 ±0.20 ±0.10				mm A4 1/1		1.27PH 1XNP 蜈蚣脚
B	1	2	3	4	5	6	7	8	9					