
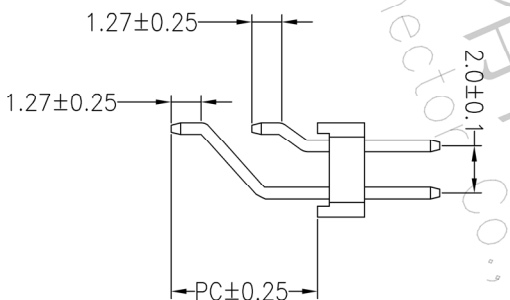
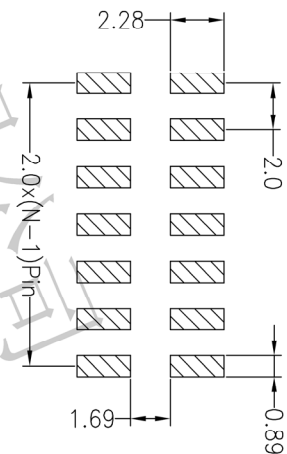
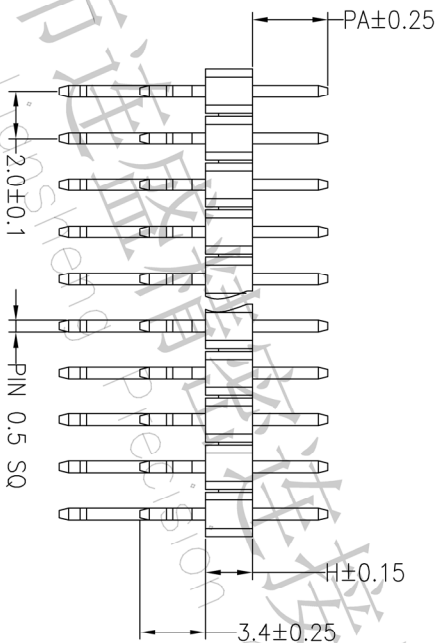


RoHS

SPECIFICATIONS


Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

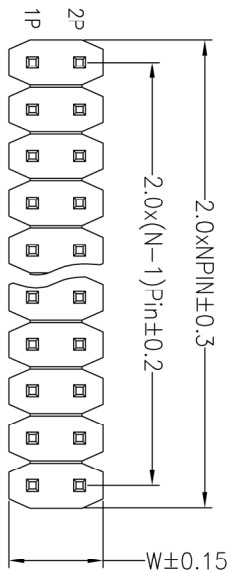

Ordering Information

P	X	X	X	XX	X	X	XX	X	XXXX
产品类型 P-插针	间距 1=1.27 2=2.0 3=2.54 5=1.0 A=1.27*2.54	塑胶壳牌 A=10 B=15 C=20 D=25	排数 1=单排 2=双排	单排PIN数 1=4P	产品形态 1=DIP 2=PA 3=SOI 5=表面贴	塑胶材料 1=PBT 2=PC 3=PPS 4=PA66 5=PA6T 9=PA9T	电镀层 00=亮镍 01=1u" 02=2u" 03=3u"	包装方式 1=卷装 2=散装 3=带装 4=盒装 5=盒装	序列号

Dimension orfitness list							
ITEM	PA	PC	PW	L短	L长	H	W
001	4.00	6.60		9.60	14.10	2.0	4.0
Alternate							



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm			A4	
X.XX	±0.20	CHECK		SIZE	A4	SHEET		1/1	
X.XXX	±0.10	APPROVE		PROJ.		TITLE:		2.0PH 2XNP 卧贴	
Angle	±3°								
DIM	TOL								

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	TITLE:
1	2012.04.11	NEW DRAWING					2.0PH 2XNP 卧贴